
by Solar Trace®
AmbarLEDS®
LUMINOUS EFFICIENCY TAKEN TO EXTREME
Iluminación
2012
actualización junio


CEPREI
CB
CE
SOLECASA
Fan Wenqi
Director
CHINA CERTIFICATE For ENERGY CONSERVATION PRODUCT
CHINA QUALITY CERTIFICATION CENTRE
CTS
DECLARATION OF CONFORMITY
EC DECLARATION OF CONFORMITY
INDUCTION LAMP
GUANGDONG SHUNXIANG ENERGY-SAVING LIGHTING TECHNOLOGY CO.,LTD
NO.1 RUYI ROAD FENGXI,CHAOZHOU CITY, GUANGDONG,CHINA
DECLARATION OF CONFORMITY
RoHS
the standard in safety
Underwriters Laboratories

WARRANTY AMBER LEDS

Amber Leds SL, supplying company of equipment and systems for Electromagnetic induction (EMI) and Leds lighting, 5 years warranty total to the items served to your customer. The customer is bound by the terms and conditions specified in the manufacturers' warranties for products being purchased by Amber Leds. The guarantee is applies to the product when used under normal operating conditions determined by the manufacturers.

The warranties contained in this Certificate shall be given by Amber Leds SL subject to the terms and conditions set forth below:

EXCLUSIONS AND LIMITATIONS OF WARRANTIES:


Generally exempt from the warranties rights established herein, damage or disruption of service or lighting equipment that originate in:

1. Accident or negligent use, improper or inadequate.
2. Not following the instructions for installation, use and maintenance established in regulations and technical standards and safety regulations, national or local range, which would be applied at all times (Low Voltage Electro technical Regulations, and technical instructions, Electromagnetic Compatibility, European standard EN-60598, etc...).
3. Supply voltage outside the normal operating range established for the power supply.
4. Place and / or location to be exceeded causing the temperature inside the equipment, or the test temperature in the enclosure (Tc) of the power source whose limits are marked in the same power source mechanism.
5. Higher moisture content at saturation (or dew) which may cause condensation on the power supply, or that exceeds the specified degree of IP protection in the element.
6. Exposure to corrosive and aggressive gases of chemical origin.
7. Section and wire length curb, inadequate to the characteristics and section of the terminals connections of the power supply.
8. No ground connecting to the equipment.
9. Modifications, installations or wrong jobs, or not performed by authorized After Sales Service of Amber Leds.
10. Damage caused by floods, plagues, earthquakes, acts of third parties or any other major force beyond normal operating conditions of the equipment and the control of Amber Leds

The warranty rights established herein do not cover transportation costs of equipment or defective lighting elements, on the returning to Amber Leds and its subsequent return to the client. No covering, likewise, intervention costs arising from dismantling the defective equipment, nor the subsequent reinstallation of equipment parts, all of the above except in the case of equipment or items purchased for use in the territory of the European Union, in which case compliance with the provisions of Law 2372003 of 10 July, which transposes to the Spanish regulation the European Directive 1999/44EC.

Amber Leds reserves the right to supply a different model or item of equipment to meet accepted warranty claims, as a replacement, in the event that the original model is no longer manufactured. All equipment or components replaced will become property of Amber Leds.

TECHNICAL SPECIFICATIONS

 **E27** The bulbs cap of all life.	 **E14** Thinner bulb cap
 **GU10** Indoor lamp sockets. Operate at 220V .	 **MR16 (or GU5.3)** Cap Typical diachronic bulbs. Operate at 12V. .
 **GU4 (or MR11)** Called Bipin bulbs. Very small. bulbs Operate at 12V DC. .	 **AR111** For applications on ceiling spotlights. LED models can operate at 12V and 220V.
 **GU23** Widely used in down light fixtures. They operate at 220V	 **GU24** Used in down light fixtures. They operate at 220V.
 **2G11** Cap for streetlight applications and similar	 **E40** Screw cap for high power bulbs. Typical streetlights, large light range, etc.. .



by Solar Trace®
AmbarLEDS®
LUMINOUS EFFICIENCY TAKEN TO EXTREME
Led

DICHROIC RGB




CHARACTERISTICS

*Porthole LED lamp RGB with remote control.
*Multiple colours and effects.
* High Brightness Light
*Includes remote control.
* Applications: Decoration, galleries, shops ...



Details

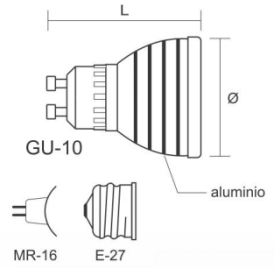



Reference	Base	Watts	Volts	Color	Lumens	L	Ø		Ángulo	Price
LED-OBGURG3AL22	GU10	3W	220V	RGB	180lm	57mm	49,5mm	Sí	38°	**26,60 €**
LED-OBE2RG3AL22	E27	3W	220V	RGB	180lm	57mm	49,5mm	Sí	38°	**26.60 €**
LED-OBMRRG3AL12	MR16	3W	12V	RGB	180lm	57mm	49,5mm	Sí	38°	**26.60 €**

DICHROIC 1W ALUMINIUM 12V




CHARACTERISTICS

*Porthole LED lamp aluminium finish.
* Faithfully replaced the halogen diachronic Mr16/Gu5.3.
* High Brightness Light
* Mount 3 diodes 1W high quality and light output..
*Applications: Decoration, galleries, shops, dormitories...



DETAILS






Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-OBMR651AL12	MR16	3W	12V	6500K	110lm	45mm	49mm	No	45°	**6.68 €**
LED-OBMR351AL12	MR16	3W	12V	3500K	100lm	45mm	49mm	No	45°	**6.68 €**

DICHROIC 2W CRISTAL 220V




CHARACTERISTICS

*LED Lamp porthole glass finish.
* Replaces faithfully to the diachronic halogen GU10.
* High Brightness Light
* SMD 3528 long service life.
*Applications: Decoration, galleries, shops, dormitories, shops ...



Details






Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
SMD-OBGU652CR22	GU10	2W	220V	6500K	220lm	47mm	49.5mm	No	120°	**6,45 €**
SMD-OBGU352CR22	GU10	2W	220V	3500K	180lm	47mm	49.5mm	No	120°	**6,45 €**

DICHROIC 3W CRISTAL 220V




CHARACTERISTICS

*LED Lamp porthole glass finish.
*Replace the diachronic halogen GU10.
* Daylight fully comfortable for any space.
* Light high brightness.
Mount DIP5 38 diodes.
*Applications: Decoration, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-OBGU503CR22	GU10	3W	220V	5000K	200lm	57mm	50mm	No	120°	**8,64 €**

DICHROIC 2W ALUMINIUM 220V




CHARACTERISTICS

*LED Lamp porthole glass finish.
*Replace the diachronic halogen GU10.
*Daylight fully comfortable for any space.
* High light brightness.
* Mount DIP5 38 diodes.
*Applications: Decoration, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-OBGU653AL22	GU10	3W	12V	6500K	330lm	55mm	49mm	No	45°	**10.40 €**
LED-OBGU353AL22	GU10	3W	12V	3500K	300lm	55mm	49mm	No	45°	**10.40 €**

DICHROIC 3W ALUMINIUM 12v




CHARACTERISTICS

Porthole LED lamp aluminium finish.
Faithfully replaced the halogen diachronic Mr16/Gu5.3.
High Brightness Light
Mount 3 diodes 1W high quality and light output.
Applications: Decoration, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-OBMR653AL12	MR16	3W	12V	6500K	330lm	45mm	49mm	No	45°	**10.40 €**
LED-OBMR353AL12	MR16	3W	12V	3500K	300lm	45mm	49mm	No	45°	**10.40 €**

DICHROIC 4W ALUMINIUM 220V




CHARACTERISTICS

*Porthole LED lamp aluminium finish.
*Replaces faithfully to the diachronic halogen GU10.
* High light brightness.
*1W diodes mounted 4 high quality and light output.
*Option E27 and E14.
*Applications: Decoration, galleries, shops, dormitories, shops ...



Details

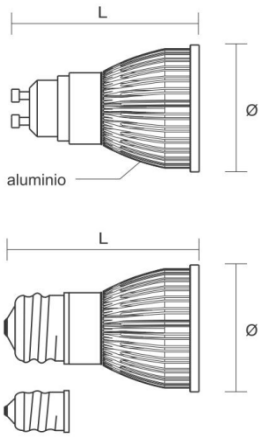



Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-OBGU654ALP2	GU10	4W	220V	6500K	440lm	70mm	48mm	No	60°	**17,05 €**
LED-OBGU354ALP2	GU10	4W	220V	3500K	400lm	70mm	48mm	No	60°	**17.05 €**
LED-OBGU654ALPR	GU10	4W	220V	6500K	440lm	70mm	48mm	Yes	60°	**19.08 €**
LED-OBGU354ALPR	GU10	4W	220V	3500K	400lm	70mm	48mm	Yes	60°	**19.08 €**
LED-OBGUAZ4ALP2	GU10	4W	220V	Blue	120lm	70mm	48mm	No	60°	**19.34 €**
LED-OBGURO4ALP2	GU10	4W	220V	Red	160lm	70mm	48mm	No	60°	**19.34 €**
LED-OBGUAM4ALP2	GU10	4W	220V	Yellow	136lm	70mm	48mm	No	60°	**19.34 €**
LED-OBGUVE4ALP2	GU10	4W	220V	Green	320lm	70mm	48mm	No	60°	**19.34 €**
LED-OBGU654AL22	GU10	4W	220V	6500K	440lm	70mm	48mm	No	45°	**17,05 €**
LED-OBGU354AL22	GU10	4W	220V	3500K	400lm	70mm	48mm	No	45°	**17.05 €**
LED-OBGU654AL2R	GU10	4W	220V	6500K	440lm	70mm	48mm	Yes	45°	**19.08 €**
LED-OBGU354AL2R	GU10	4W	220V	3500K	400lm	70mm	48mm	Yes	45°	**19.08 €**
LED-OBGUAZ4AL22	GU10	4W	220V	Blue	120lm	70mm	48mm	No	45°	**19.34 €**
LED-OBGURO4AL22	GU10	4W	220V	Red	160lm	70mm	48mm	No	45°	**19.34 €**
LED-OBGUAM4AL22	GU10	4W	220V	Yellow	136lm	70mm	48mm	No	45°	**19.34 €**
LED-OBGUVE4AL22	GU10	4W	220V	Green	320lm	70mm	48mm	No	45°	**19.34 €**

DICHROIC 4W ALUMINIUM 12V




CHARACTERISTICS

*Porthole LED lamp aluminium finish.
* Replaces faithfully to the diachronic halogen GU10.
* High light brightness.
*1W diodes mounted 4 high quality and light output.
*Option E27 and E14.
*Applications: Decoration, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-OBMR654ALP1	MR16	4W	12V	6500K	440lm	65mm	48mm	No	60°	**17,05 €**
LED-OBMR354ALP1	MR16	4W	12V	3500K	400lm	65mm	48mm	No	60°	**17.05 €**
LED-OBMR654ALPR	MR16	4W	12V	6500K	440lm	65mm	48mm	Yes	60°	**19,08 €**
LED-OBMR354ALPR	MR16	4W	12V	3500K	400lm	65mm	48mm	Yes	60°	**19.08 €**
LED-OBMR654AL12	MR16	4W	12V	6500K	440lm	65mm	48mm	No	45°	**17,05 €**
LED-OBMR354AL12	MR16	4W	12V	3500K	400lm	65mm	48mm	No	45°	**17.05 €**
LED-OBMR654ALR1	MR16	4W	12V	6500K	440lm	65mm	48mm	Yes	45°	**19,08 €**
LED-OBMR354ALR1	MR16	4W	12V	3500K	400lm	65mm	48mm	Yes	45°	**19.08 €**

MINI LAMP 360° PLÁSTIC




CHARACTERISTICS

*Lamp designed to replace incandescent bulbs G9 and E27 220V.
*80-90% energy savings compared to incandescent lamps.
* High light brightness.
*3528 SMD LED extremely long life.
*Applications: Decoration, galleries, shops,



Details





Reference	BASE	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-MING965348	G9	3W	220V	6500K	260lm	69mm	31mm	No	360°	**10,40 €**
LED-MING935348	G9	3W	220V	3500K	240lm	69mm	31mm	No	360°	**10,40 €**
LED-MINE265348	E27	3W	220V	6500K	260lm	69mm	31mm	No	360°	**10,40 €**
LED-MINE235348	E27	3W	220V	3500K	240lm	69mm	31mm	No	360°	**10,40 €**

MINI LAMP 360° ALUMINIUM




CHARACTERISTICS

*Lamp designed to replace incandescent bulbs G9 and E27 220V.
*80-90% energy savings compared to incandescent lamps
*Light high brightness.
3528 SMD LED extremely long life.
*Applications: home decoration, offices, galleries, shops, dormitories, shops ...



Details






Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-MINE165527	E14	5W	220V	6500K	430lm	73mm	31mm	No	360°	**16,50 €**
LED-MINE265527	E27	5W	220V	6500K	430lm	73mm	31mm	No	360°	**16,50 €**
LED-MINE135527	E14	5W	220V	3500K	420lm	73mm	31mm	No	360°	**16,50 €**
LED-MINE235527	E27	5W	220V	3500K	420lm	73mm	31mm	No	360°	**16,50 €**

PEAR ALUMINIUM




CHARACTERISTICS

*Led Lamp "Pear" with aluminium finished
Designed to replace incandescent bulbs E27.
Mount five 1W LEDs.
Applications: home decoration, offices, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-PEE2655AL	E27	5W	220V	6500K	550lm	90mm	60mm	No	120°	**19,04 €**
LED-PEE2505AL	E27	5W	220V	5000K	525lm	90mm	60mm	No	120°	**19,04 €**
LED-PEE2355AL	E27	5W	220V	3500K	500lm	90mm	60mm	No	120°	**19,04 €**

MINI LAMP PEAR ALUMINIUM




CHARACTERISTICS

*Lamp designed to replace incandescent bulbs G9 and E27 220V.
*80-90% energy savings compared to incandescent lamps.
* High brightness Light
*3528 SMD LED extremely long life.
*Applications: home decoration, offices, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-MINPE1653BL	E14	3W	220V	6500K	330lm	10mm	50mm	No	360°	**9,32 €**
LED-MINPE2653BL	E27	3W	220V	6500K	330lm	10mm	50mm	No	360°	**9,32 €**
LED-MINPE1353BL	E14	3W	220V	3500K	300lm	10mm	50mm	No	360°	**9,32 €**
LED-MINPE2353BL	E27	3W	220V	3500K	300lm	10mm	50mm	No	360°	**9,32 €**

GLOBE PEAR ALUMINIUM




CHARACTERISTICS

*Lamp designed to replace incandescent bulbs 220V E27.
*80-90% energy savings compared to incandescent lamps.
*Applications: home decoration, offices, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-GPEE2965AL	E27	9W	220V	6500K	990lm	145mm	95mm	No	120°	**30,20 €**
LED-GPEE2950AL	E27	9W	220V	5000K	945lm	145mm	95mm	No	120°	**30,20 €**
LED-GPEE2935AL	E27	9W	220V	3500K	900lm	145mm	95mm	No	120°	**30,20 €**

MINI GLOBE ALUMINIUM



CHARACTERISTICS

*Small size lamp designed to replace incandescent bulbs 220V E27.
*80-90% energy savings compared to incandescent lamps.
*Available in both E14 and in E27.
*Applications: home decoration, offices, galleries, shops, dormitories, shops ...



Details



Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-GMNE1465AL	E14	4W	220V	6500K	440lm	135mm	50mm	No	180°	**15,80 €**
LED-GMNE2465AL	E27	4W	220V	6500K	440lm	135mm	50mm	No	180°	**15,80 €**
LED-GMNE1450AL	E14	4W	220V	5000K	420lm	135mm	50mm	No	180°	**15,80 €**
LED-GMNE2450AL	E27	4W	220V	5000K	420lm	135mm	50mm	No	180°	**15,80 €**
LED-GMNE1435AL	E14	4W	220V	3500K	400lm	135mm	50mm	No	180°	**15,80 €**
LED-GMNE2435AL	E27	4W	220V	3500K	400lm	135mm	50mm	No	180°	**15,80 €**

MINI GLOBE PLÁSTIC




CHARACTERISTICS

*Small size lamp designed to replace incandescent bulbs 220V E27.
* 80-90% energy savings compared to incandescent lamps.
*Available in both E14 and in E27.
*Applications: home decoration, offices, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-GMNE2365PL	E27	3W	220V	6500K	260lm	76mm	45mm	No	140°	**11,42 €**
LED-GMNE2335PL	E27	3W	220V	3500K	250lm	76mm	45mm	No	140°	**11,42 €**

CANDLE ALUMINIUM




CHARACTERISTICS

*This lamp includes a ceramic base with a thermal conductivity coefficient which accelerates very high dissipation of heat generated by the LED chip, keeping them at a lower temperature and ensuring its useful life. Its design and dimensions make it compatible with most market luminaries.
*Applications: home decoration, offices, galleries, shops, dormitories, shops....



Details

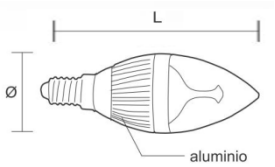




Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-VEE14653B	E14	3W	220V	6500K	330lm	110mm	38mm	No	195°	**13,16 €**
LED-VEE14353B	E14	3W	220V	3500K	300lm	110mm	38mm	No	195°	**13,16 €**

LAMP R7S 5W




CHARACTERISTICS

*Lamp R7S double type connector designed to replace halogen projectors installed.
*80-90% energy savings compared to incandescent lamps.
*Scope: shop, exhibitions ...



Details






Reference	Base	Watts	Volts	Color	Lumen	L	C	Ø		Ángulo	Price
LED-R7S655	R7S	5W	220V	6500K	432lm	78mm	54mm	54mm	No	360°	**30,20 €**
LED-R7S355	R7S	5W	220V	3500K	412lm	78mm	54mm	54mm	No	360°	**30,20 €**

LAMP R7S 10W




CHARACTERISTICS

*Lamp R7S double type connector designed to replace halogen projectors installed.
*80-90% energy savings compared to incandescent lamps.
*Scope: shop, exhibitions....



Details





Reference	Base	Watts	Volts	Color	Lumen	L	C	Ø		Ángulo	Price
LED-R7S6510	R7S	10W	220V	6500K	864lm	118mm	81mm	54mm	No	360°	**37,40 €**
LED-R7S3510	R7S	10W	220V	3500K	795lm	118mm	81mm	54mm	No	360°	**37,40 €**

LAMP 360º E27
44 LEDs SMD




CHARACTERISTICS

*Lamp R7S double type connector designed to replace halogen projectors installed.
*80-90% Energy Savings Compared to incandescent lamps.
*Scope: shop, exhibitions....



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-LEE26544SMD	E27	7W	220V	6500K	660lm	110mm	38mm	No	360°	**21,80 €**
LED-LEE25044SMD	E27	7W	220V	5000K	620lm	110mm	38mm	No	360°	**21,80 €**
LED-LEE16544SMD	E14	7W	220V	6500K	660lm	110mm	38mm	No	360°	**21,80 €**
LED-LEE15044SMD	E14	7W	220V	5000K	620lm	110mm	38mm	No	360°	**21,80 €**

LAMP 360º E27
60 LEDs SMD




CHARACTERISTICS

*Lamp designed to replace bulbs in E14 and E27.
*Great power lighting with high efficiency technology.
*Totally comfortable light for any space.
*High Light brightness.
* Mount 60 SMD diodes.
*Applications: home decoration, offices, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-LEE26560SMD	E27	10W	220V	6500K	900lm	125mm	50mm	No	360°	**27,80 €**
LED-LEE25060SMD	E27	10W	220V	5000K	860lm	125mm	50mm	No	360°	**27,80 €**
LED-LEE16560SMD	E14	10W	220V	6500K	900lm	125mm	50mm	No	360°	**27,80 €**
LED-LEE15060SMD	E14	10W	220V	5000K	860lm	125mm	50mm	No	360°	**27,80 €**

LAMP 360º E40 18W




CHARACTERISTICS

*Lamp designed to replace bulbs in E40.
*Great power lighting with high efficiency technology.
*Totally comfortable light for any space.
*High brightness light ideal for outdoor.
*Applications: all kinds of exterior, interior, offices



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-LEE46518	E40	18W	220V	6500K	1980lm	160mm	100mm	No	360°	**96,20 €**
LED-LEE45018	E40	18W	220V	5000K	1890lm	160mm	100mm	No	360°	**96,20 €**
LED-LEE43518	E40	18W	220V	3500K	1800lm	160mm	100mm	No	360°	**96,20 €**

LAMP 360º E40 24W




CHARACTERISTICS

*Lamp designed to replace bulbs in E40.
*Great power lighting with high efficiency technology.
*Totally comfortable light for any space.
*High brightness light ideal for outdoor.
*Applications: all kinds of exterior, interior, offices, galleries, shops, business ...



Details






Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-LEE46524	E40	24W	220V	6500K	2640lm	180mm	100mm	No	360°	**105,80 €**
LED-LEE45024	E40	24W	220V	5000K	2520lm	180mm	100mm	No	360°	**105,80 €**
LED-LEE43524	E40	24W	220V	3500K	2400lm	180mm	100mm	No	360°	**105,80 €**


PLASTIC SMD DOWNLIGHT

CHARACTERISTICS

- Lamp LED down light plastic finish.
- 3528 SMD LED extremely long life.
- Replaces bulbs low energy down light G24 and E27.
- High light brightness.
- Applications: offices, shops, kitchens, bathrooms ...
- It is essential to remove the glass or down light reflector and the ballast of low power (if any) for the proper maintenance of the lamp and maintaining your warranty.



Details






Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo
LED-DLG24654.5	G24	4.5W	220V	6500K	700lm	157mm	42mm	No	120°
LED-DLG24354.5	G24	4.5W	220V	3500K	600lm	157mm	42mm	No	120°
LED-DLE27654.5	E27	4.5W	220V	6500K	700lm	158mm	42mm	No	120°
LED-DLE27354.5	E27	4.5W	220V	3500K	600lm	158mm	42mm	No	120°

DOWNLIGHT SMD ALUMINIUM




CHARACTERISTICS

- Lamp LED down light aluminium finish.
- 3528 SMD LED extremely long life.
- Replaces bulbs low energy down light G24 and E27.
- High light brightness.
- Applications: offices, shops, kitchens, bathrooms ...
- It is essential to remove the glass or down light reflector and the ballast of low power (if any) for the proper maintenance of the lamp and maintaining your warranty.



Details

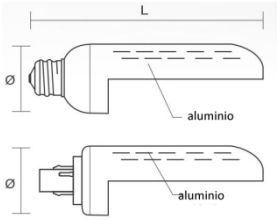



Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-DLA24654.5	G24	4.5W	220V	6500K	700lm	157mm	42mm	No	120°	**26,00 €**
LED-DLA24354.5	G24	4.5W	220V	3500K	600lm	157mm	42mm	No	120°	**26,00 €**
LED-DLA27654.5	E27	4.5W	220V	6500K	700lm	157mm	42mm	No	120°	**26,00 €**
LED-DLA27354.5	G24	4.5W	220V	3500K	600lm	157mm	42mm	No	120°	**26,00 €**

DISC DOWNLIGHT 15W




CHARACTERISTICS

- Lamp designed to replace two lamps down light low power.
- It has an aluminium heat sink for better thermal balance.
- Light high brightness.
- 1W diodes mounted 15 top quality and light output.
- Includes power supply.
- It is installed just above the protective glass, removing the reflector.
- Applications: offices, shops, kitchens, bathrooms ...



Details

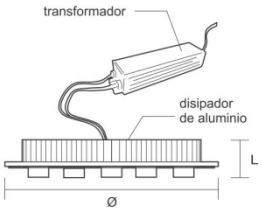




Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-DLDIS6515	-	15W	220V	6500K	1650lm	40mm	167mm	No	120°	**38,60 €**
LED-DLDIS5015	-	15W	220V	5000K	1575lm	40mm	167mm	No	120°	**38,60 €**
LED-DLDIS3515	-	15W	220V	3500K	1500lm	40mm	167mm	No	120°	**38,60 €**

DISC DOWNLIGHT 20W




CHARACTERISTICS

- Lamp designed to replace two lamps down light low power.
- It has an aluminium heat sink for better thermal balance.
- Light high brightness.
- Mount on 20 diodes 1W high quality and light output.
- Includes power supply.
- It is installed just above the protective glass, removing the reflector.
- Applications: offices, shops, kitchens, bathrooms..



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-DLDIS6520	-	20W	220V	6500K	2200lm	47mm	167mm	No	120°	**51,80 €**
LED-DLDIS5020	-	20W	220V	5000K	2100lm	47mm	167mm	No	120°	**51,80 €**
LED-DLDIS3520	-	20W	220V	3500K	2000lm	47mm	167mm	No	120°	**51,80 €**

PAR30 ALUMINIUM




CHARACTERISTICS

- PAR30 LED lamp aluminium finish.
- Great power lighting with high efficiency technology.
- Totally comfortable light for any space.
- Light high brightness.
- Large aluminium heat sink.
- Mount 7 diodes 1W high quality and light output.
- Applications: decoration, offices, galleries, shops, dormitories, shops ...



Details






Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-P30E2657AP	E27	7W	220V	6500K	770lm	99mm	94mm	No	120°	**28,16 €**
LED-P30E2507AP	E27	7W	220V	5000K	735lm	99mm	94mm	No	120°	**28,16 €**
LED-P30E2357AP	E27	7W	220V	3500K	700lm	99mm	94mm	No	120°	**28,16 €**

PAR38 ALUMINIUM




CHARACTERISTICS

- PAR38 LED lamp aluminium finish.
- Great power lighting with high efficiency technology.
- Totally comfortable light for any space.
- High light brightness.
- Large aluminium heat sink.
- 1W diodes mounted 12 top quality and light output.
- Applications: decoration, offices, galleries, shops, dormitories, shops ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-P38E26512AP	E27	12W	220V	6500K	1320lm	112mm	122mm	No	120°	**41,72 €**
LED-P38E25012AP	E27	12W	220V	5000K	1260lm	112mm	122mm	No	120°	**41,72 €**
LED-P38E23512AP	E27	12W	220V	3500K	1200lm	112mm	122mm	No	120°	**41,72 €**

R111 9W ALUMINIUM




CHARACTERISTICS

- Halide lamp designed to replace R-111 high brightness.
- Light high brightness.
- Mount 9 diodes 1W high quality and light output.
- Includes power supply.
- Applications: offices, shops, kitchens, bathrooms ...



Details






Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-DLR111659	-	9W	220V	6500K	990lm	48mm	111mm	No	60°	**41,24 €**
LED-DLR111509	-	9W	220V	5000K	945lm	48mm	111mm	No	60°	**41,24 €**
LED-DLR111359	-	9W	220V	3500K	900lm	48mm	111mm	No	60°	**41,24 €**
LED-DLR111659R	-	9W	220V	6500K	990lm	48mm	111mm	Yes	60°	**43,28 €**
LED-DLR111509R	-	9W	220V	5000K	945lm	48mm	111mm	Yes	60°	**43,28 €**
LED-DLR111359R	-	9W	220V	3500K	900lm	48mm	111mm	Yes	60°	**43,28 €**

R111 12W ALUMINIUM




CHARACTERISTICS

- Halide lamp designed to replace R-111 high brightness.
- High light brightness.
- 1W diodes mounted 12 top quality and light output.
- Includes power supply.
- Applications: offices, shops, kitchens, bathrooms ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-DLR1116512	-	12W	220V	6500K	1320lm	48mm	111mm	No	60°	**47,20 €**
LED-DLR1115012	-	12W	220V	5000K	1260lm	48mm	111mm	No	60°	**47,20 €**
LED-DLR1113512	-	12W	220V	3500K	1200lm	48mm	111mm	No	60°	**47,20 €**

R111 10W ALUMINIUM




CHARACTERISTICS

- Halide lamp designed to replace R-111 high brightness.
- High light brightness.
- Mount 6 diodes maximum quality and light output.
- Includes power supply.
- Applications: offices, shops, kitchens, bathrooms ...



Details





Reference	Base	Watts	Volts	Color	Lumen	L	Ø		Ángulo	Price
LED-DLR1116510	-	10W	220V	6500K	1100lm	55mm	111mm	No	60°	**48,20 €**
LED-DLR1115010	-	10W	220V	5000K	1050lm	55mm	111mm	No	60°	**48,20 €**
LED-DLR1113510	-	10W	220V	3500K	1000lm	55mm	111mm	No	60°	**48,20 €**

CIRCULAR APPLIQUE 50




CHARACTERISTICS

- Circular apply diachronic recessed circular mounting.
- Silver material anodized aluminium.
- Easy to install.
- Adjustable.
- High quality finishing





Details

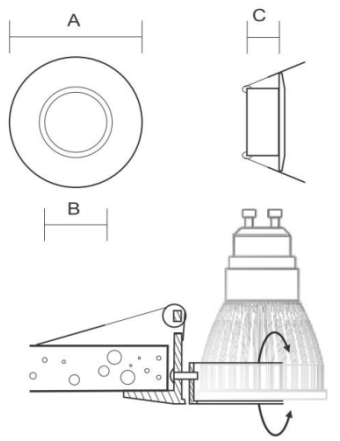

Reference	A	B	C	Price
APL-OBCIRMET	87mm	50mm	20mm	**2,82 €**

CIRCULAR APPLIQUE 90



CHARACTERISTICS


- Circular apply recessed PAR30 fixation.
- Silver material anodized aluminium.
- Easy to install.
- Adjustable.

*High quality finishes.





Details

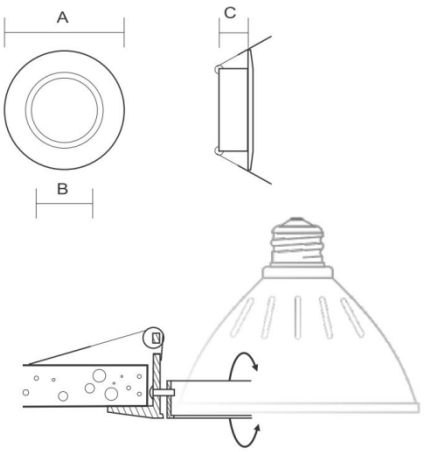

Reference	A	B	C	Price
APL-PAR30CIRMET	138mm	94mm	20mm	**5,88 €**

CIRCULAR APPLIQUE R111




CHARACTERISTICS

- Circular apply recessed locking R111.
- Silver material anodized aluminium.
- Easy to install.
- Adjustable.
- High quality finishes.





Details

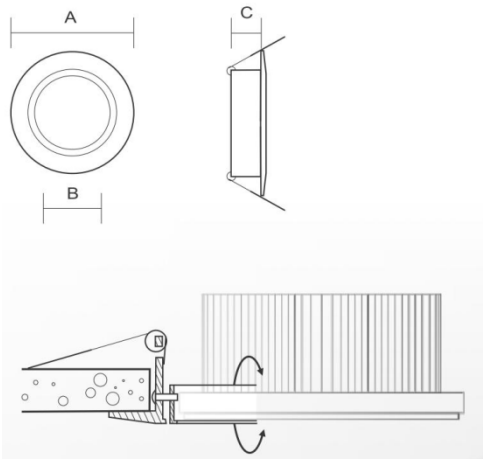

Reference	A	B	C	Price
APL-R111CIRMET	160mm	111mm	28mm	**8,40 €**

SQUARE APLIQUE R111




CHARACTERISTICS

- Circular apply recessed locking R111.
- Silver material anodized aluminium.
- Easy to install.
- Adjustable.

* High quality finishes.



Details

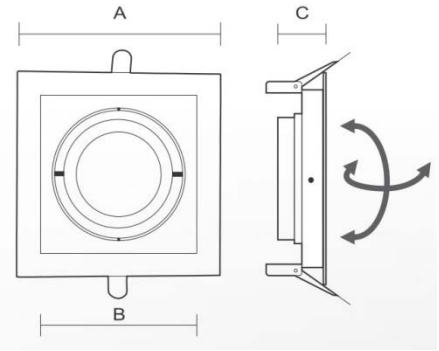

Reference	A	B	C	Price
APL-R111CUABLAN	190mm	150mm	35mm	**24,00 €**
APL-R111CUANEG	190mm	150mm	35mm	**24,00 €**

CIRCULAR APPLIQUE DOWNLIGHT




CHARACTERISTICS

- Fixing circular apply recessed down light discs.
- Silver material anodized aluminium.
- Easy to install.
- Includes glass.
- High quality finishes.
- Finished in black and metallic.



Details

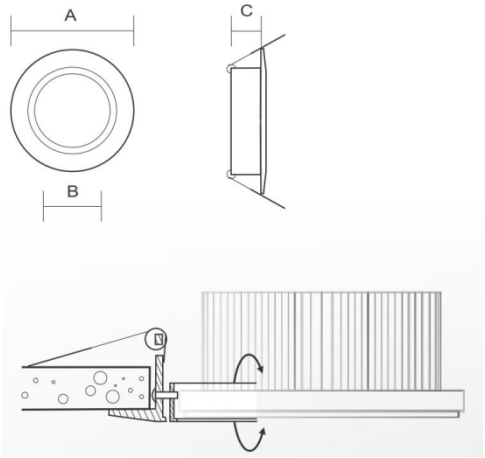

Reference	A	B	C	Price
APL-DOWNCIRBLC (blanco)	220mm	180mm	20mm	**14,04 €**
APL-DOWNCIRMET (metalizado)	220mm	180mm	20mm	**16,08 €**

LED TUBE T8




CHARACTERISTICS

- Led tubes that replace fluorescent tubes.
- Immediate start and flicker.
- Led Tube with super brightness SMD 3528 diodes.
- PCB made of aluminium and aluminium tube as "D" with sink ensures excellent heat dissipation.
- Applications: supermarkets, classrooms, work areas, kitchens, parking ...

* Installation: remove primer.



Details

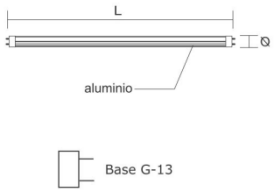



Reference	Top	Watts	Volts	Color	Lumen	L	Ø	Leds	Ángulo	Price
LED-T8651060RY	Striped	10W	220V	6500K	1296lm	600mm	26mm	162	120°	**35,60 €**
LED-T8501060RY	Striped	10W	220V	5000K	1205lm	600mm	26mm	162	120°	**35,60 €**
LED-T86518120RY	Striped	18W	220V	6500K	2300lm	1200mm	26mm	288	120°	**57.80 €**
LED-T85018120RY	Striped	18W	220V	5000K	2220lm	1200mm	26mm	288	120°	**57.80 €**
LED-T86522150RY	Striped	22W	220V	6500K	2880lm	1500mm	26mm	360	120°	**69.80 €**
LED-T85022150RY	Striped	22W	220V	5000K	2790lm	1500mm	26mm	360	120°	**69,80 €**


Disponibles en todos los colores RGB

INTERNAL SOURCE PROJECTOR




CHARACTERISTICS

- Replaces high intensity halogen floodlights.
- With mounting bracket and outdoor setting appropriate variable.
- Very bright, high reliability and robustness, along with significant energy savings of up to 90% less than a halogen lamp.
- Immediate start and flicker.
- Body and aluminium heat sink.
- Mounts Micro Led 1.1mm diode.
- Applications: exterior facades, displays, floor, ceiling, billboards ...



Details

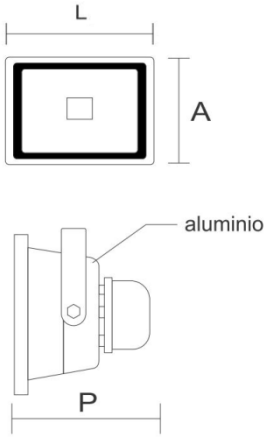



Reference	IP	Watts	Volts	Color	Lumen	L	A	P	Ángulo	Equivalent	Price
LED-PROYI6510	IP65	10W	220V	6500K	900lm	115mm	85mm	78mm	120°	Spotlight 50W	**42,20 €**
LED-PROYI5010	IP65	10W	220V	5000K	845lm	115mm	85mm	78mm	120°	Spotlight 50W	**42,20 €**
LED-PROYI3510	IP65	10W	220V	3500K	810lm	115mm	85mm	78mm	120°	Spotlight	**42,20 €**
LED-PROYI6520	IP65	20W	220V	6500K	1800lm	180mm	140mm	102mm	120°	Spotlight	**71.00 €**
ED-PROYI5020	IP65	20W	220V	5000K	1750lm	180mm	140mm	102mm	120°	Spotlight	**71.00 €**
LED-PROYI3520	IP65	20W	220V	3500K	1700lm	180mm	140mm	102mm	120°	Spotlight	**71.00 €**
LED-PROYI6530	IP65	30W	220V	6500K	2700lm	287mm	243mm	135mm	120°	Spotlight	**102,20 €**
LED-PROYI5030	IP65	30W	220V	5000K	2650lm	287mm	243mm	135mm	120°	Spotlight	**102,20 €**
LED-PROYI3530	IP65	30W	220V	3500K	2600lm	287mm	243mm	135mm	120°	Spotlight	**102,20 €**

EXTERNAL SOURCE PROJECTOR




Characteristics

- Replaces high intensity halogen floodlights.
- With mounting bracket and outdoor setting appropriate variable.
- Very bright, high reliability and robustness, along with significant energy savings of up to 90% less than a halogen lamp.
- Immediate start and flicker.
- Body and aluminium heat sink.
- Mount Micro Led 1.1mm diode.
- Applications: exterior facades, displays, floor, ceiling, billboards ....

No emite calor · Sin mercurio · MicroLed · No UV/IR · 5 AÑOS · Vida útil: 60.000 h

Details

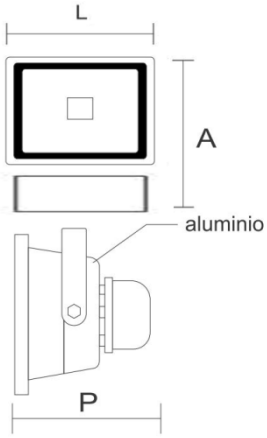



Reference	IP	Watts	Volts	Color	Lumen	L	A	P	Ángulo	Equivalent	Price
LED-PROYE6530	IP65	30W	220V	6500K	2700lm	220mm	275mm	75mm	120°	Spotlight 100W	**102,20 €**
LED-PROYE5030	IP65	30W	220V	5000K	2650lm	220mm	275mm	75mm	120°	Spotlight 100W	**102,20 €**
LED-PROYE3530	IP65	30W	220V	3500K	2600lm	220mm	275mm	75mm	120°	Spotlight 100W	**102,20 €**
LED-PROYE6550	IP65	50W	220V	6500K	4500lm	285mm	360mm	100mm	120°	Spotlight 150W	**167,00 €**
LED-PROYE5050	IP65	50W	220V	5000K	4450lm	285mm	360mm	100mm	120°	Spotlight 150W	**167,00 €**
LED-PROYE3550	IP65	50W	220V	3500K	4400lm	285mm	360mm	100mm	120°	Spotlight 150W	**167,00 €**
LED-PROYE65100	IP65	100W	220V	6500K	9000lm	360mm	485mm	140mm	120°	Spotlight 300W	**336,20 €**
LED-PROYE50100	IP65	100W	220V	5000K	8950lm	360mm	485mm	140mm	120°	Spotlight 300W	**336,20 €**
LED-PROYE35100	IP65	100W	220V	3500K	8900lm	360mm	485mm	140mm	120°	Spotlight 300W	**336,20 €**

RECTANGULAR PROJECTOR 18W




CHARACTERISTICS

- Replaces high intensity halogen floodlights.
- With mounting bracket and outdoor setting appropriate variable.
- Very bright, high reliability and robustness, along with significant energy savings of up to 90% less than a halogen lamp.
- Immediate start and flicker.
- 1W diodes mounted 18 top quality and light output.
- Body and aluminium heat sink.
- Applications: exterior facades, displays, floor, ceiling, billboards ...

No emite calor · Sin mercurio · MAX-LUZ 18 LEDs · No UV/IR · 5 AÑOS · Vida útil: 60.000 h

Details

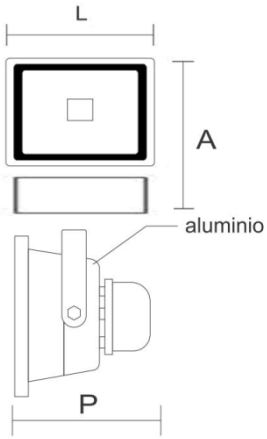




Reference	IP	Watts	Volts	Color	Lumen	L	A	P	Ángulo	Equivalent	Price
LED-PROYE6518	IP65	18W	220V	6500K	1980lm	190mm	145mm	100mm	120°	Spotlight 70w	**86,60 €**
LED-PROYE3518	IP65	18W	220V	3500K	1980lm	190mm	145mm	100mm	120°	Spotlight 70w	**86,60 €**

RECTANGULAR PROJECTOR 24W




CHARACTERISTICS

- Replaces high intensity halogen floodlights.
- With mounting bracket and outdoor setting appropriate variable.
- Very bright, high reliability and robustness, along with significant energy savings of up to 90% less than a halogen lamp.
- Immediate start and flicker.
- 1W diodes mounted 24 top quality and light output.
- Body and aluminium heat sink.
- Applications: exterior facades, displays, floor, ceiling, billboards ...



Details

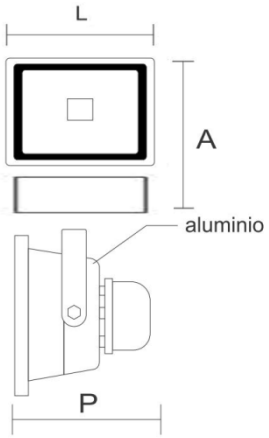




Reference	IP	Watts	Volts	Color	Lumen	L	A	P	Ángulo	Equivalent	Price
LED-PROYE6524	IP65	24W	220V	6500K	2640lm	320mm	145mm	100mm	120°	Spotlight 80W	**125,00 €**
LED-PROYE3524	IP65	24W	220V	3500K	2640lm	320mm	145mm	100mm	120°	Spotlight 80W	**125,00 €**

RECTANGULAR PROJECTOR 36W




CHARACTERISTICS

- Replaces high intensity halogen floodlights.
- With mounting bracket and outdoor setting appropriate variable.
- Very bright, high reliability and robustness, along with significant energy savings of up to 90% less than a halogen lamp.
- Immediate start and flicker.
- Mount 36 diodes 1W high quality and light output.
- Body and aluminium heat sink.
- Applications: exterior facades, displays, floor, ceiling, billboards ...



Details

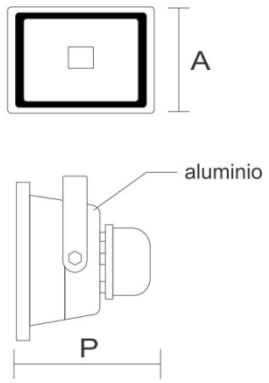



Reference	IP	Watts	Volts	Color	Lumen	L	A	P	Ángulo	Equivalent	Price
LED-PROYE6536	IP65	36W	220V	6500K	3960lm	330mm	160mm	100mm	120°	Spotlight 100W	**162,20 €**
LED-PROYE3536	IP65	36W	220V	3500K	3960lm	330mm	160mm	100mm	120°	Spotlight 100W	**162,20 €**

CIRCULAR PROJECTOR 120°




CHARACTERISTICS

- Replaces high intensity halogen floodlights.
- With mounting bracket and outdoor setting appropriate variable.
- Very bright, high reliability and robustness, along with significant energy savings of up to 90% less than a halogen lamp.
- Immediate start and flicker.
- 1W diodes mounted 12 top quality and light output.
- Body and aluminium heat sink.
- Applications: exterior facades, displays, floor, ceiling, billboards



Details





Reference	IP	Watts	Volts	Color	Lumen	L	A	Ø	Ángulo	Equivalent	Price
LED-PROYR6512	IP65	12W	220V	6500K	1320lm	75mm	230mm	180mm	120°	Spotlight 50W	**57,80 €**
LED-PROYR3512	IP65	12W	220V	3500K	1320lm	75mm	230mm	180mm	120°	Spotlight 50W	**57,80 €**

CIRCULAR PROJECTOR 150°






CHARACTERISTICS

- Replaces high intensity halogen floodlights.
- With mounting bracket and outdoor setting appropriate variable.
- Very bright, high reliability and robustness, along with significant energy savings of up to 90% less than a halogen lamp.
- Immediate start and flicker.
- Available in 9W and 12W.
- Body and aluminium heat sink.
- Applications: exterior facades, displays, floor, ceiling, billboards ...



Details





Reference	IP	Watts	Volts	Color	Lumen	L	A	Ø	Ángulo	Equivalent	Price
LED-PROYRA659	IP65	9W	220V	6500K	990lm	75mm	230mm	180mm	150°	Spotlight 50W	**47,60 €**
LED-PROYRA359	IP65	9W	220V	3500K	910lm	75mm	230mm	180mm	150°	Spotlight 50W	**47,60 €**
LED-PROYRA6512	IP65	12W	220V	6500K	1320lm	75mm	230mm	180mm	150°	Spotlight 50W	**57,80 €**
LED-PROYRA3512	IP65	12W	220V	3500K	1260lm	75mm	230mm	180mm	150°	Spotlight 50W	**57,80 €**

HIGH INTENSITY PROJECTOR




CHARACTERISTICS

- Replaces high intensity halogen floodlights.
- With mounting bracket and outdoor setting appropriate variable.
- Very bright, high reliability and robustness, along with significant energy savings of up to 90% less than a halogen lamp.
- Immediate start and flicker.
- Body and aluminium heat sink.
- Applications: exterior facades, displays, floor, ceiling, billboards ...



Details






Reference	IP	Watts	Volts	Color	Lumen	L	A	P	Ángulo	Equivalent	Price
LED-PROY65120	IP65	120W	220V	6500K	14400lm	335mm	335mm	165mm	120°	Spotlight 400W	**450,20 €**
LED-PROY35120	IP65	120W	220V	3500K	14000lm	335mm	335mm	165mm	120°	Spotlight 400W	**450,20 €**

PROJECTOR RGB




CHARACTERISTICS

- Projector RGB high power LED.
- With mounting bracket and variable adjustment suitable for indoor and outdoor (IP65).
- Ideal for retail and providing plated wall facades, alcoves, accent lighting and color effects.
- Body and aluminium heat sink.
- Includes joystick.
- Applications: exterior facades, displays, floor, ceiling, billboards ...



Details

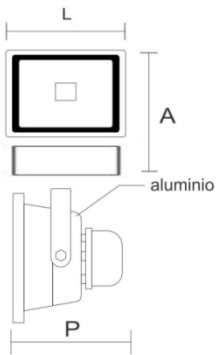




Reference	IP	Watts	Volts	Color	Lumen	L	A	B	Ángulo	Price
LED-PROYIRGB10	IP65	10W	220V	RGB	800lm	115mm	85mm	78mm	120°	**63,80 €**
LED-PROYIRGB20	IP65	20W	220V	RGB	1600lm	180mm	140mm	102mm	120°	**96,20 €**
LED-PROYIRGB30	IP65	30W	220V	RGB	2400lm	225mm	185mm	130mm	120°	**126,20 €**
LED-PROYIRGB50	IP65	50W	220V	RGB	4000lm	287mm	243mm	135mm	120°	**185,00 €**

LINEAR PROJECTOR




CHARACTERISTICS

- Replaces linear high intensity LED.
- With mounting bracket and outdoor setting appropriate variable.
- Ideal for retail and providing plated wall facades, alcoves, accent lighting and color effects.
- Body and aluminium heat sink.
- Applications: exterior facades, displays, floor, ceiling, billboards ...



Details





Reference	IP	Watts	Volts	Color	Lumen	L	A	B	Ángulo	Price
LED-PROYL6518	IP65	18W	220V	6500K	1980lm	1000mm	46mm	110mm	70°	**71,00 €**
LED-PROYL3518	IP65	18W	220V	3500K	1800lm	1000mm	46mm	110mm	70°	**71,00 €**
LED-PROYLRGB18	IP65	18W	220V	RGB	900lm	1000mm	46mm	110mm	70°	**71,00 €**

STREET LUMINAIRE




CHARACTERISTICS

- IP65 outdoor luminaries for all types of roads, especially suitable for street lighting.
- Large aluminium heat sink to ensure the useful life.
- Composed of high intensity leds and maximum brightness, ensuring a uniform luminance and pleasant.
- Applications: exterior facades, roads, street lighting ...



Details

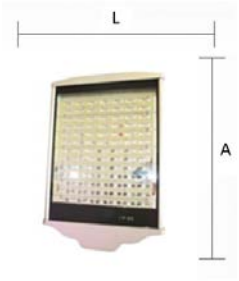



Reference	IP	Watts	Volts	Color	Lumen	L	A	B	Ángulo	Price
LED-VIAL6542	IP65	42W	220V	6500K	4620lm	305mm	440mm	90mm	120°	**283,20 €**
LED-VIAL5042	IP65	42W	220V	5000K	4620lm	305mm	440mm	90mm	120°	**283,20 €**
LED-VIAL3542	IP65	42W	220V	3500K	4620lm	305mm	440mm	90mm	120°	**283,20 €**
LED-VIAL6556	IP65	56W	220V	6500K	6160lm	305mm	440mm	90mm	120°	**308,60 €**
LED-VIAL5056	IP65	56W	220V	5000K	6160lm	305mm	440mm	90mm	120°	**308,60 €**
LED-VIAL3556	IP65	56W	220V	3500K	6160lm	305mm	440mm	90mm	120°	**308,60 €**
LED-VIAL6570	IP65	70W	220V	6500K	7700lm	305mm	440mm	90mm	120°	**338,60 €**
LED-VIAL5070	IP65	70W	220V	5000K	7700lm	305mm	440mm	90mm	120°	**338,60 €**
LED-VIAL3570	IP65	70W	220V	3500K	7700lm	305mm	440mm	90mm	120°	**338,60 €**


PAR56



CHARACTERISTICS

- Led lamp with glass knob made.
- Consisting of 350 high-brightness LEDs.
- Multiple sets of RGB colors and light fixtures.
- With this LED lamp will only have to change your old halogen bulb and get better lighting and cheaper.
- It does not require any installation, only, remove the bulb and replace it.

Details

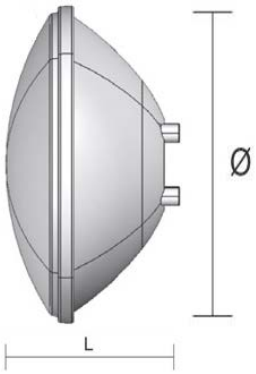



Reference	IP	Watts	Volts	Color	Lumen	L	Ø	Ángulo	Price
LED-LEP5RGB2512	IP68	25W	12V	RGB	2200lm	108mm	179mm	120°	**108,20 €**

POOL



CHARACTERISTICS

- Led Lamp with Remote for pool, made of glass.
- Consisting of 350 high-brightness LEDs.
- Multiple sets of RGB colors and light fixtures.
- With this LED lamp will only have to change your old halogen bulb and get a better pool lit and cheaper.
- Surface installation.
- Includes lamp and bezel.

Details





Reference	IP	Watts	Volts	Color	Lumen	L	Ø	Ángulo	Price
LED-LESURGB2612	IP68	26W	12V	RGB	2200lm	100mm	178mm	120°	**168,20 €**

LED STRIP RGB 5050



CHARACTERISTICS

- Coil Led 5m 5050 SMD Interior and exterior.
- High intensity LEDs.
- Available for 30 pcs leds / mtr. and 60 pcs leds / mtr.
- Model half round with 3M adhesive back and front resin.

Details





Reference	IP	Watts	Volts	Color	Wide	High	Ángulo	Price
LED-LERORGB7.2	IP65	7.2W/mtr.	12V	RGB	10mm	3mm	120°	**74,60 €**
LED-LERORGB14.4	IP65	14.4W/mtr.	12V	RGB	10mm	3mm	120°	**108,20 €**


Consult for shorter trams

WHITE LED STRIP 5050




CHARACTERISTICS

- Coil Led 5m 5050 SMD Interior and exterior.
- High intensity LEDs.
- Available for 60 pcs leds / mtr.
- Model half round with 3M adhesive back and front resin.



Details





Reference	IP	Watts	Volts	Color	Wide	High	Ángulo	Price
LED-LERO6M14.4	IP65	14.4W/mtr.	12V	6000K	10mm	3mm	120°	**108,20 €**
LED-LERO4514.4	IP65	14.4W/mtr.	12V	4500K	10mm	3mm	120°	**108,20 €**
LED-LERO3514.4	IP65	14.4W/mtr.	12V	3500K	10mm	3mm	120°	**108,20 €**

Consult for shorter trams

MINI LED STRIP



CHARACTERISTICS

- LED Strip lighting with male-female splice able.
- High intensity LEDs.
- TIR1: 9 pcs LEDs DIP5 and rigid. LEDs 19mm spacing.
- TIR2: 12 pcs SMD 5050 waterproof LED rigid. LEDs 20mm spacing.
- With adhesive on the rear face.
- Very known in furniture, shelves and mirrors.



Details





Reference	IP	Watts	Volts	Color	Wide	Long	High	Ángulo	Price
LED-TIR16M0.8	IP65	0.8W	12V	6000K	8mm	225mm	7mm	120°	**4,62 €**
LED-TIR26M0.8	IP65	0.8W	12V	6000K	10mm	300mm	15mm	120°	**10,80 €**

MULTICOLOR LED STRIP 3528

RE3528**-60



RE3528**-120



CHARACTERISTICS

- Coil Led 5m 3528 SMD Interior and exterior.
- High intensity LEDs.
- Available for 60 pcs leds / mtr. and for 120 pcs leds / mtr.
- Model half round with 3M adhesive back and front resin.

No emite calor · Sin mercurio · SMD · No UV/IR · 5 AÑOS · Vida útil: 60.000 h

Details







Reference	IP	Watts	Volts	Color	Wide	High	Ángulo	Price
LED-LERO6M4.8	IP65	4.8W/mtr.	12V	6000K	8mm	3mm	120°	**50,60 €**
LED-LERO454.8	IP65	4.8W/mtr.	12V	4500K	8mm	3mm	120°	**50,60 €**
LED-LERO3M4.8	IP65	4.8W/mtr.	12V	3000K	8mm	3mm	120°	**50,60 €**
LED-LEROAZ4.8	IP65	4.8W/mtr.	12V	Blue	8mm	3mm	120°	**50,60 €**
LED-LERORO4.8	IP65	4.8W/mtr.	12V	Red	8mm	3mm	120°	**50,60 €**
LED-LEROAM4.8	IP65	4.8W/mtr.	12V	Yellow	8mm	3mm	120°	**50,60 €**
LED-LEROVE4.8	IP65	4.8W/mtr.	12V	Green	8mm	3mm	120°	**50,60 €**
LED-LERO6M9.6	IP65	9.6W/mtr.	12V	6000K	8mm	3mm	120°	**79,40 €**
LED-LERO459.6	IP65	9.6W/mtr.	12V	4500K	8mm	3mm	120°	**79,40 €**
LED-LERO3M9.6	IP65	9.6W/mtr.	12V	3000K	8mm	3mm	120°	**79,40 €**
LED-LEROAZ9.6	IP65	9.6W/mtr.	12V	Blue	8mm	3mm	120°	**79,40 €**
LED-LERORO9.6	IP65	9.6W/mtr.	12V	Red	8mm	3mm	120°	**79,40 €**
LED-LEROAM9.6	IP65	9.6W/mtr.	12V	Yellow	8mm	3mm	120°	**79,40 €**
LED-LEROVE9.6	IP65	9.6W/mtr.	12V	Green	8mm	3mm	120°	**79,40 €**

Consult for shorter trams

FPC START CONNECTOR



CHARACTERISTICS

- Start Connector for RGB Led coil, 5050 and 3528.
- Exclusive interior.
- Connect quickly and clean Led strips.
- Cut in desired location, protective silicone retire, Led strip insert and close the connector.

Details



Reference	A	B	C	Price
FPCINICIORGB	10mm	-	-	**0,90 €**
FPCINICIO5050	10mm	-	-	**0,90 €**
FPCINICIO3528	8mm	-	-	**0,90 €**

FPC SPLICE



CHARACTERISTICS

- Coil splices connector for RGB Led, 5050 and 3528.
- Exclusive interior.
- Splice quickly and cleanly led strips.
- Cut in desired location, protective silicone retire, Led strip insert and close the connector

Details



Reference	A	B	C	Price
FPCINICIORGB	10mm	-	-	**1,20 €**
FPCINICIO5050	10mm	-	-	**1,20 €**
FPCINICIO3528	8mm	-	-	**1,20 €**

FPC CONECTOR



CHARACTERISTICS

- Coil splices connector for RGB Led, 5050 and 3528.
- Exclusive interior.
- Splice quickly and cleanly Led strips.
- Cut in desired location, protective silicone retire, Led strip insert and close the connector.

Details



Reference	A	B	C	Price
FPCINICIORGB	10mm	-	-	**0,90 €**
FPCINICIO5050	10mm	-	-	**0,90 €**
FPCINICIO3528	8mm	-	-	**0,90 €**

EXTERNAL MALE-FEMALE CONNECTOR



CHARACTERISTICS

- External connector male to female for DCRGB, DC3.5 and DC5.5.
- Includes 30cm cable.
- Connection method male-female threads for safety.



Details



Reference	A	B	C	Price
JTDEXTRGB	-	-	-	**3,72 €**
JTDEXTDC5.5	-	-	-	**3,24 €**
JTDEXTDC3.5	-	-	-	**3,00 €**

REMOTE LED

CON-IR24



CHARACTERISTICS

- LED RGB Controller with remote.
- Compact and ultra thin.
- Maximum load: 2A per color. All the brightness and speed is adjustable. Available with 24 and 48 different functions.

REMOTE LED

CON-IR48



Reference	Volts	Output	A	B	C	Price
LED-CONTIR24	12V	2A By canal	50mm	35mm	22mm	**14,40 €**
LED-CONTIR48	12V	2A By canal	50mm	35mm	22mm	**18,00 €**

REMOTE LED RF6B



CHARACTERISTICS

- LED RGB Controller with remote.
- LED-CONTROLRF6B has 21 types of different color changes.
- LED-CONTROLRF8B has 25 types of different color changes.
- Allows control via buttons on the controller.
- Includes remote control.

REMOTE LED RF8B



Reference	Volts	Output	Weight	A	B	C	Price
LED-CONTRF6B	12V	4A By canal	110 gr.	130mm	40mm	31mm	**30,00 €**
LED-CONTRF8B	12V	4A By canal	110 gr.	121mm	53mm	25mm	**36,00 €**

LED CONTROLLER KEY6



CHARACTERISTICS

- LED RGB Controller.
- LED-CONTROLKEY6 has 21 types of different color changes.
- LED-CONTROLKEY8 has 25 types of different color changes.
- Control via buttons on the controller.

LED CONTROLLER KEY8



Reference	Volts	Output	Weight	A	B	C	Price
LED-CONTKEY6	12V	4A by canal	110 gr.	130mm	40mm	31mm	**27,60 €**
LED-CONTKEY8	12V	4A by canal	110 gr.	121mm	53mm	25mm	**33,60 €**

EXTERIOR REMOTE CONTROLLER



CHARACTERISTICS

- LED RGB Controller with Remote Outdoor.
- Includes remote control.

Details



Reference	Volts	Output	Weight	A	B	C	Price
LED-CONTRFEXT4B	12V	4A by canal	215 gr.	96mm	66mm	26mm	**44,40 €**

EXTERIOR REMOTE CONTROLLER DMX



CHARACTERISTICS

- DMX RGB LED Controller with Remote Outdoor.
- Includes remote control.

Details



Reference	Volts	Output	Weight	A	B	C	Price
LED-CONTRFEXD4B	12V	4A by canal	295 gr.	95mm	67mm	26mm	**66,00 €**

CONTROLLER “TOUCH”



CHARACTERISTICS

- RGB LED Controller Touch with RF remote control.
- Roulette Touch to adjust color.
- Includes remote control RF

Details



Reference	Volts	Output	A	B	C	
LED-CONTRFTOU	12V	6A by canal	58mm	70mm	28mm	

Led controller



CHARACTERISTICS

- Controller / Regulator Led mono coils.
- Brightness control for LED strips 1 channel or 1 color.
- Includes mini remote control with power regulator.

Details



Reference	Volts	Output	weight	A	B	C	
LED-REGRF1CH	12V	4A by canal	130gr	110mm	56mm	34m	

Converter 12V to 220V



CHARACTERISTICS

- Converts the current battery 12V car connector, to a maximum power of 300W.
- Incorporates USB outlet for charging phones and other USB devices.
- Very useful in places where there are outlets such as camping, cars, boats ... may at any time have a socket for connecting any type of appliance, charger, etc..

Details



Reference	Volts	Watts
CONVERT300	**12v**	300W


SOURCE 3W



CHARACTERISTICS

- Power supply constant current.
- Accurate power signal.
- Protection against excess current.
- Small, compact size.
- Suitable for LED lighting.
- You can feed 2-3 1W LED.

Details



Reference	Input current	Output current	A	B	C	Price
ALIM3	85VAC - 265VAC. 50/60Hz 0.2A	6VDC - 12VDC. 330mA±5%	37mm	22mm	27mm	**3,96 €**


SOURCE 6W



CHARACTERISTICS

- Power supply constant current.
- Accurate power signal.
- Protection against excess current.
- Small, compact size.
- Suitable for LED lighting.
- You can feed 2-3 3W LEDs.

Details



Reference	Input Current	Output current	A	B	C	Price
ALIM6	85VAC - 265VAC. 50/60Hz 0.2A	5VDC - 12VDC. 660mA±5%	40mm	20mm	42mm	**6,60 €**


SOURCE 9W



CHARACTERISTICS

- Power supply constant current.
- Accurate power signal.
- Protection against excess current.
- Small, compact size.
- Suitable for LED lighting.
- You can feed 2-3 3W LEDs.

Details



Reference	Input Current	Output current	A	B	C	Price
ALIM9	100VAC - 240VAC. 50/60Hz 0.5A	36VDC - 65VDC. 300mA±5%	79mm	52mm	28mm	**6,00 €**


SOURCE 12W



CHARACTERISTICS

- Power supply constant current.
- Accurate power signal.
- Protection against excess current.
- Small, compact size.
- Suitable for LED lighting.
- You can feed 12 1W LEDs.

Details



Reference	Input Current	Output current	A	B	C	Price
ALIM12	100VAC - 240VAC. 50/60Hz 0.5A	36VDC - 65VDC. 300mA±5%	79mm	52mm	28mm	**7,20 €**


SOURCE 18W



CHARACTERISTICS

- Power supply constant current.
- Accurate power signal.
- Protection against excess current.
- Small, compact size.
- Suitable for LED lighting.
- Aluminium body.
- You can feed 18 1W LEDs.

Details



Reference	Input Current	Output current	A	B	C	Price
ALIM18	100VAC - 240VAC. 50/60Hz 0.5A	36VDC - 65VDC. 300mA±5%	29mm	20mm	100mm	**10,80 €**


SOURCE 25W



CHARACTERISTICS

- Power supply constant current.
- Accurate power signal.
- Protection against excess current.
- Small, compact size.
- Suitable for LED lighting.
- Aluminium body.
- You can feed 25 1W LEDs.

Details



Reference	Input Current	Output current	A	B	C	Price
ALIM25	100VAC - 240VAC. 50/60Hz 0.4A	54VDC - 90VDC. 300mA±5%	29mm	20mm	100mm	**13,20 €**

SOURCE 40W-150W



CHARACTERISTICS

- Supply high performance.
- Good heat dissipation.
- SOURCE 300 integrated fan.
- Anchor cables screw terminals with self-locking washer.
- Refrigerated stainless steel housing.

FUENTE 300



Reference	Voltage	Amperage	Potency	A	B	C	Price
ALIM40	12V	3.5A	40W	110mm	80mm	40mm	**13,20 €**
ALIM60	12V	5A	60W	165mm	105mm	40mm	**17,04 €**
ALIM75	12V	6.2A	75W	165mm	100mm	45mm	**18,00 €**
ALIM100	12V	8.5A	100W	205mm	105mm	45mm	**20,40 €**
ALIM150	12V	12.5A	150W	205mm	100mm	45mm	**22,80 €**
ALIM300	12V	25A	300W	205mm	100mm	45mm	**45,60 €**


TRANSFORMER



CHARACTERISTICS

- Power/ transformer

Details



Reference	Volts	Potency	Price
TRAL12V1A	110-120V a 12V	1A	**6,00 €**
TRAL12V2A	110-120V a 12V	2A	**7,20 €**


Pressure Connector



CHARACTERISTICS

- Quick Pressure connector.
- Ideal for cable connections Ø 3mm.
- Facilitates connection complicated workspaces.

Details



Reference	A	B	C	Price
CONECPRES	23mm	15mm	30mm	**0,36 €**

LAMP HOLDER E14



CHARACTERISTICS

- E14 lamp holder socket.
- Plastic.
- Without cable.
- Two fixing holes.

LAMP HOLDER E27



CHARACTERISTICS

- E27 lamp holder socket.
- Plastic.
- Without cable.
- Two fixing holes.

Reference	Price		Reference	Price
PORTE14	**0,70 €**		PORTE27	**0,70 €**

LAMP HOLDER MR16



CHARACTERISTICS

- MR16 lamp holder socket.
- Ceramic material.
- Cable 15 cm.
- Two fixing holes.

LAMP HOLDER E40



CHARACTERISTICS

- .
- E40 lamp holder socket.
- Plastic.
- Without cable.
- Two fixing holes.

Reference	Price		Reference	Price
PORTMR16	**0,70 €**		PORTE40	**2,30 €**

LAMP HOLDER GU10



CHARACTERISTICS

- GU10 lamp socket holder.
- Ceramic material.
- Cable 15 cm.
- Two fixing holes.

ADAPTER G9-E27



CHARACTERISTICS

- G9 lamp holder socket.
- Ceramic material.
- Without cable.
- Two fixing holes.

Reference	Price		Reference	Price
PORTGU10	**0,70 €**		ADAPG9E27	**1,53 €**

ADAPTER E14-E27



CHARACTERISTICS

- Adapter E14 to E27.
- Plastic.

ADAPTER GU10-E27



CHARACTERISTICS

- GU10 to E27 Adapter.
- Plastic.

Reference	Price		Reference	Price
ADAPE14E27	**0,95 €**		ADAPGU10E27	**1,15 €**

ADAPTER E27-E14



CHARACTERISTICS

- Adapter E27 to E14.
- Plastic.

ADAPTER E27-E40



CHARACTERISTICS

- Adapter E27 to E40.
- Plastic.

Reference	Price		Reference	Price
ADAPE27E14	**1,05 €**		ADAPE27E40	**0,85 €**

ADAPTER GU10-E14



CHARACTERISTICS

- GU10 to E14 Adapter.
- Plastic.

ADAPTER MR16-E27



CHARACTERISTICS

- MR16 to E27 Adapter.
- Plastic.

Reference	Price		Reference	Price
ADAPGU10E14	**1,20 €**		ADAPMR16E27	**1,23 €**

Inducción Electromagnética



by Solar Trace®

AmbarLEDS®

LUMINOUS EFFICIENCY TAKEN TO EXTREME

SLK-DLA



CHARACTERISTICS

- Luminary made of cast aluminium two parts shockproof.
- Reflector in high purity aluminium moulding.
- Protector of heat resistant glass.
- Applicable lighting municipalities, communities, residential, primary and secondary roads, public parks, outside warehouses, etc..

Vida útil: 80.000 h

Details



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DL060A	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 390 x 181 mm	≥0,98	**425,00 €**
SLK-DL085A	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 390 x 181 mm	≥0,98	**438,60 €**
SLK-DL125A	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 390 x 181 mm	≥0,98	**493,00 €**
SLK-DL165A	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 390 x 181 mm	≥0,98	**506,60 €**

SLK-DLJ




CHARACTERISTICS

- Luminary cast aluminium alloy.
- The lamp has preparation of lightweight structures with corrosion resistance.
- The reflector is polished high purity aluminium, has a stable performance and high optical reflectivity.
- Applicable lighting municipalities, communities, residential, primary and secondary roads, public parks, outside warehouses, etc..

Vida útil: 80.000 h

Details

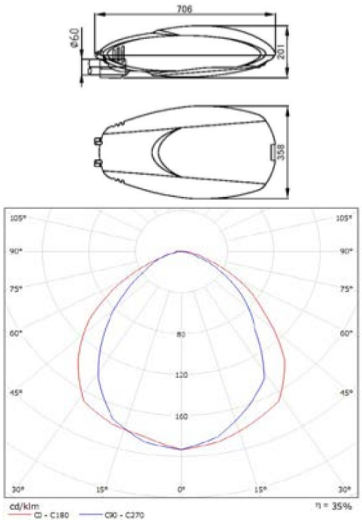

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DL040J	IP65	40W	2800lm	2700 – 6400K	240V AC	180 – 250V AC	706 x 358 x 201 mm	≥0,98	**348,12 €**
SLK-DL060J	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	706 x 358 x 201 mm	≥0,98	**394,40 €**
SLK-DL085J	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	706 x 358 x 201 mm	≥0,98	**404,60 €**
SLK-DL125J	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	706 x 358 x 201 mm	≥0,98	**425,00 €**
SLK-DL165J	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	706 x 358 x 201 mm	≥0,98	**462,40 €**

SLK-DLK




CHARACTERISTICS

- The lamp body, upper frame and tailstock are aluminium alloy.
- The lamp has light structure durability. The reflector is attached to tempered glass with silicone sealant, which allows light to maintain high strength properties, good transparency and ease of installation.
- Anodized aluminium reflector.
- Applicable to lighting in the municipal primary and secondary arteries, motorways, railways, etc.

Vida útil: 80.000 h

Details

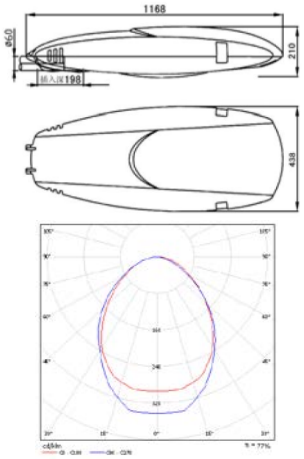

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DL080K	IP65	40Wx2	5040lm	2700 – 6400K	240V AC	180 – 250V AC	1168 x 438 x 210 mm	≥0,98	**725,97 €**
SLK-DL125K	IP65	125Wx2	15750lm	2700 – 6400K	240V AC	180 – 250V AC	1168 x 438 x 210 mm	≥0,98	**840,14 €**
SLK-DL165K	IP65	165Wx2	19800lm	2700 – 6400K	240V AC	180 – 250V AC	1168 x 438 x 210 mm	≥0,98	**966,57 €**

SLK-DLM




CHARACTERISTICS

- High quality, aluminium casting training, lasting attachment with stainless steel fasteners.
- Suitable for roads, streets, parks, squares, docks, warehouses outside, etc..

Vida útil: 80.000 h

Details

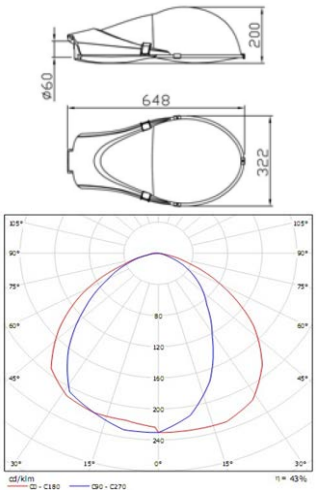

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DL040M	IP65	40W	2800lm	2700 – 6400K	240V AC	180 – 250V AC	648 x 322 x 200 mm	≥0,98	**337,46 €**
SLK-DL060M	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	648 x 322 x 200 mm	≥0,98	**326,40 €**
SLK-DL085M	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	648 x 322 x 200 mm	≥0,98	**336,.60 €**
SLK-DL125M	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	648 x 322 x 200 mm	≥0,98	**391,00 €**
SLK-DL165M	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	648 x 322 x 200 mm	≥0,98	**411,40 €**

SLK-DDL




CHARACTERISTICS

- Luminary cast aluminium high pressure.
- It has high strength, withstands high temperatures.
- Tempered glass arched aluminium reflector and high purity, it delivers optimal light distribution.
- Applicable to the exterior lighting of urban roads, highways, roads, shopping streets, parking and more.

Vida útil: 80.000 h

Details

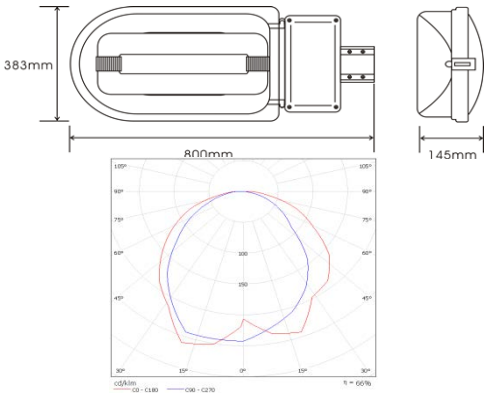

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DD080L	IP65	80W	6400lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**459,00 €**
SLK-DD100L	IP65	100W	8000lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**476,00 €**
SLK-DD120L	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**493,00 €**
SLK-DDL150	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**527,00 €**
SLK-DDL200	IP65	200W	16000lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**544,00 €**

SLK-DD01L




CHARACTERISTICS

- Luminary cast aluminium high pressure.
- It has high strength, withstands high temperatures.
- Tempered glass arched aluminium reflector and high purity, it delivers optimal light distribution.
- Applicable to the exterior lighting of urban roads, highways, roads, streets, malls, parks, etc.

Vida útil: 80.000 h

Details

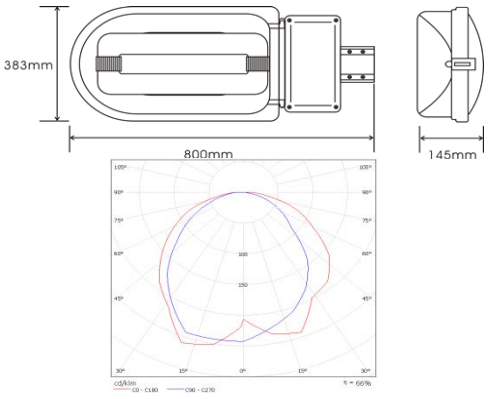

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DD01080L	IP65	80W	6400lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**493,00 €**
SLK-DD01100L	IP65	100W	8000lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**510,00 €**
SLK-DD01120L	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**527,00 €**
SLK-DDL01150	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**544,00 €**
SLK-DDL01200	IP65	200W	16000lm	2700 – 6400K	240V AC	180 – 250V AC	830 x 383 x 145 mm	≥0,98	**578,00 €**

SLK-FGK




CHARACTERISTICS

- Cast aluminium luminary high intensity.
- Treatment Silastic static outer thermoplastic, resistant to water and dust.
- The reflector is made of a moulded sheet of pure aluminium.
- Suitable mainly for tunnel lighting, public squares, outdoor advertising, public parks, subways, mines and other spaces that require lighting fix.

Vida útil: 80.000 h

Details

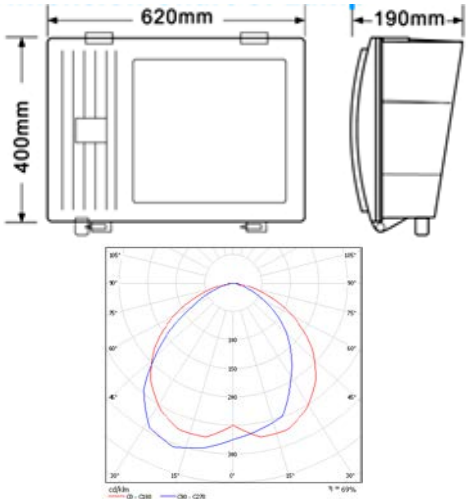

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FG060K1	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	620 x 400 x 190 mm	≥0,98	**425,00 €**
SLK-FG085K1	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	620 x 400 x 190 mm	≥0,98	**438,60 €**
SLK-FG125K1	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	620 x 400 x 190 mm	≥0,98	**510,00 €**
SLK-FG165K1	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	620 x 400 x 190 mm	≥0,98	**527,00 €**

SLK-DFG01




CHARACTERISTICS

- Anti-impact luminary cast aluminium high pressure with the advantage of high temperature strength.
- Aesthetics and good outdoor durability behaviour.
- High efficiency reflector mirror with polished aluminium surface.
- High strength tempered glass, high light transmission and anti-impact.
- Applicable in traffic tunnels, commuter, mining areas, etc..

Vida útil: 80.000 h

Details

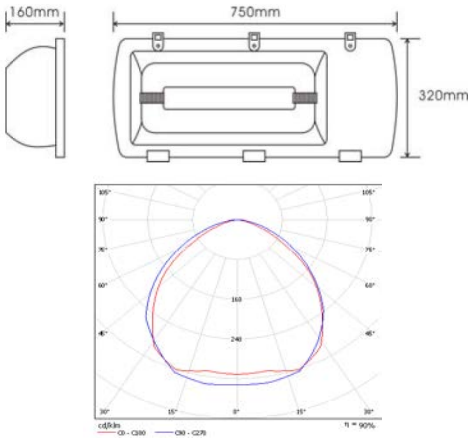

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DFG08001	IP65	80W	6400lm	2700 – 6400K	240V AC	180 – 250V AC	750 x 320 x 160 mm	≥0,98	**476,00 €**
SLK-DFG10001	IP65	100W	8000lm	2700 – 6400K	240V AC	180 – 250V AC	750 x 320 x 160 mm	≥0,98	**493,00 €**
SLK-DFG12001	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	750 x 320 x 160 mm	≥0,98	**510,00 €**
SLK-DFG15001	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	750 x 320 x 160 mm	≥0,98	**527,00 €**
SLK-DFG20001	IP65	200W	16000lm	2700 – 6400K	240V AC	180 – 250V AC	750 x 320 x 160 mm	≥0,98	**561,00 €**

SLK-FGA




CHARACTERISTICS

- Luminary with aluminium die cast.
- Aluminium reflector plane.
- Tempered glass, 5 mm Silastic sealing strip, waterproof and dustproof.
- Corrosion resistance and durability.

Indicated primarily for road tunnel lighting, plazas, outdoor advertising, public parks, underground mines, etc..

Vida útil: 80.000 h

Details

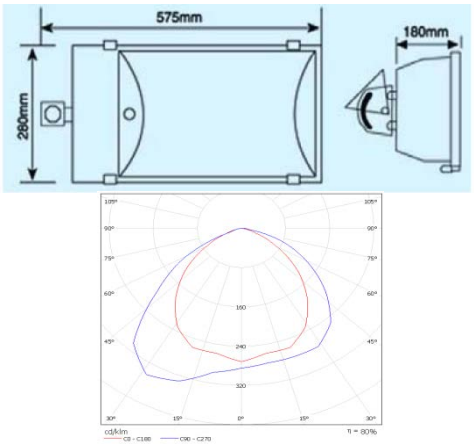

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FG060A	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	575 x 280 x 180 mm	≥0,98	**302,60 €**
SLK-FG085A	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	575 x 280 x 180 mm	≥0,98	**323,00 €**
SLK-FG125A	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	575 x 280 x 180 mm	≥0,98	**336,60 €**
SLK-FG165A	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	575 x 280 x 180 mm	≥0,98	**357,00 €**

SLK-DLL




CHARACTERISTICS

- Luminary with high intensity display, tempered glass with good transparency.
- Made of cast aluminium alloy with light structure and high corrosion resistance.
- It is applicable to road traffic, urban roads, yards, residential areas, etc..

Vida útil: 80.000 h

Details

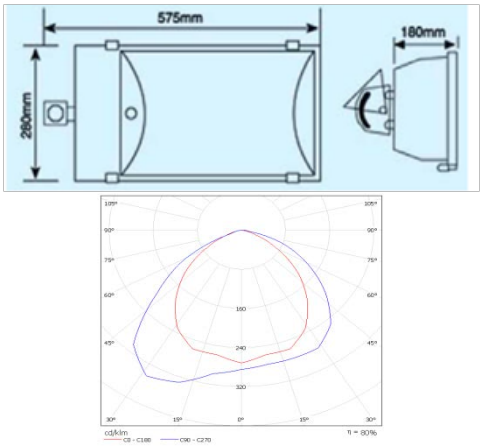

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DL060L	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	558 x 355 x 180 mm	≥0,98	**333,20 €**
SLK-DL085L	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	558 x 355 x 180 mm	≥0,98	**357,00 €**
SLK-DL125L	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	558 x 355 x 180 mm	≥0,98	**370,60 €**
SLK-DL165L	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	558 x 355 x 180 mm	≥0,98	**408,00 €**

SLK-XGD1





CHARACTERISTICS

- Luminary with cast aluminium housing with high intensity and PVC screen that gives good looks and soft lighting.
- Especially suitable lighting in shopping centers and supermarkets.

Vida útil: 80.000 h

Details





Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060D2	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	445 x ø410 mm	≥0,98	**282,20 €**
SLK-XG085D2	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	445 x ø410 mm	≥0,98	**292,40 €**
SLK-XG125D2	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	445 x ø410 mm	≥0,98	**309,40 €**
SLK-XG165D2	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	445 x ø410 mm	≥0,98	**329,80 €**

SLK-XGD2





CHARACTERISTICS

- Luminary with cast aluminium housing with high intensity and PVC screen that gives good looks and soft lighting.
- Especially suitable lighting in shopping centers and supermarkets.

Vida útil: 80.000 h

Details





Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060D2	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	445 x ø410 mm	≥0,98	**289,00 €**
SLK-XG085D2	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	445 x ø410 mm	≥0,98	**306,00 €**
SLK-XG125D2	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	445 x ø410 mm	≥0,98	**323,00 €**
SLK-XG165D2	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	445 x ø410 mm	≥0,98	**336,60 €**

SLK-XGC





CHARACTERISTICS

- Luminary with cast aluminium housing with high intensity and PVC screen that gives good looks and soft lighting.
- Especially suitable lighting in shopping centers and supermarkets.

Vida útil: 80.000 h

Details

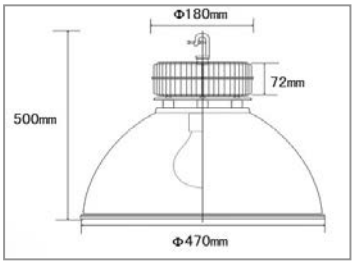



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060C	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	500 x ø470 mm	≥0,98	**268,60 €**
SLK-XG085C	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	500 x ø480 mm	≥0,98	**282,20 €**
SLK-XG125C	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	500 x ø470 mm	≥0,98	**295,80 €**
SLK-XG165C	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	500 x ø470 mm	≥0,98	**309,40 €**

SLK-XGBE





CHARACTERISTICS

- Luminary with cast aluminium electrical box.
- Designed for use in large shops or stores with sealing requirements.

Vida útil: 80.000 h

Details

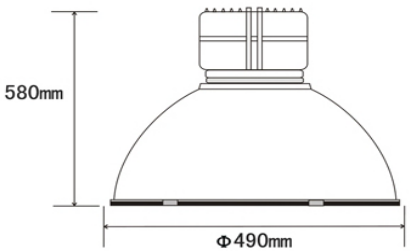



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060BE	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	580 x ø490 mm	≥0,98	**302,60 €**
SLK-XG085BE	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	580 x ø490 mm	≥0,98	**323,00 €**
SLK-XG125BE	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	580 x ø490 mm	≥0,98	**336,60 €**
SLK-XG165BE	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	580 x ø490 mm	≥0,98	**357,00 €**

SLK-XGBW




CHARACTERISTICS

- Luminary with cast aluminium electrical box.
- Designed for use in large shops or stores with sealing requirements

Vida útil: 80.000 h

Details

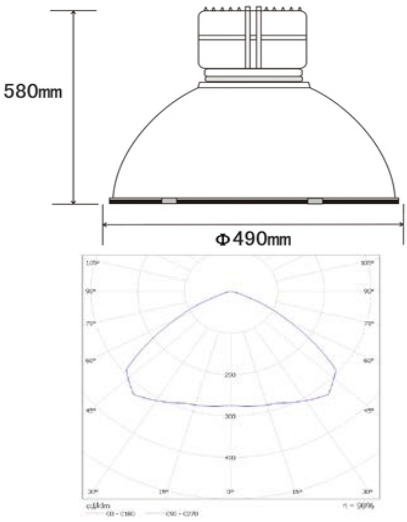

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060BW	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	580 x ø490 mm	≥0,98	**261,80 €**
SLK-XG085BW	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	580 x ø490 mm	≥0,98	**275,40 €**
SLK-XG125BW	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	580 x ø490 mm	≥0,98	**289,00 €**
SLK-XG165BW	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	580 x ø490 mm	≥0,98	**302,60 €**

SLK-XGE1




CHARACTERISTICS

- Luminary with cast aluminium housing with high intensity.
- Reflector of high purity aluminium.
- Indicated in office lighting, showrooms, museums, libraries, conference rooms, shopping centers, etc..

Vida útil: 80.000 h

Details

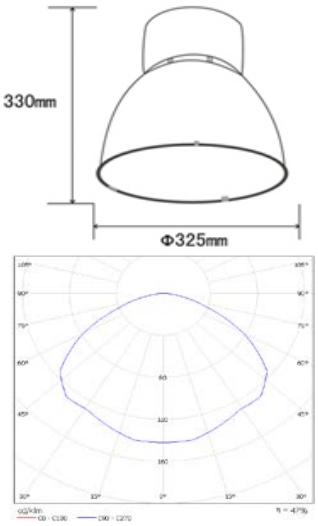

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060E2	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	330 x ø325 mm	≥0,98	**268,60 €**
SLK-XG085E2	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	330 x ø325 mm	≥0,98	**282,20 €**
SLK-XG125E2	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	330 x ø325 mm	≥0,98	**295,80 €**
SLK-XG165E2	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	330 x ø325 mm	≥0,98	**309,40 €**

SLK-XGE2




CHARACTERISTICS

- Luminary with cast aluminium housing with high intensity.
- Reflector of high purity aluminium.
- Indicated in office lighting, showrooms, museums, libraries, conference rooms, shopping centers, etc..

Vida útil: 80.000 h

Details

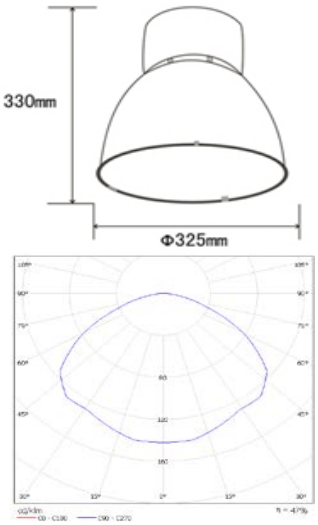

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060E2	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	330 x ø325 mm	≥0,98	**289,00 €**
SLK-XG085E2	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	330 x ø325 mm	≥0,98	**306,00 €**
SLK-XG125E2	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	330 x ø325 mm	≥0,98	**323,00 €**
SLK-XG165E2	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	330 x ø325 mm	≥0,98	**336,60 €**

SLK-DXG02




CHARACTERISTICS

- Luminary with cast aluminium housing with high intensity.
- Reflector of high purity aluminium.
- Indicated in lighting of malls and supermarkets.

Vida útil: 80.000 h

Details

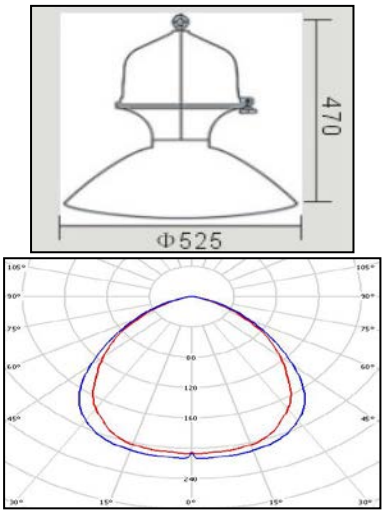

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DXG08002	IP65	80W	6400lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø525 mm	≥0,98	**323,00 €**
SLK-DXG10002	IP65	100W	8000lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø525 mm	≥0,98	**340,00 €**
SLK-DXG12002	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø525 mm	≥0,98	**357,00 €**
SLK-DXG15002	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø525 mm	≥0,98	**374,00 €**
SLK-DXG20002	IP65	200W	16000lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø525 mm	≥0,98	**391,00 €**
SLK-DXG30002	IP65	300W	24000lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø525 mm	≥0,98	**459,00 €**

SLK-XGQ




CHARACTERISTICS

- Luminary with cast aluminium housing with high intensity.
- Reflector of high purity aluminium.
- Indicated in office lighting, showrooms, museums, libraries, conference rooms, shopping centers, etc..

Vida útil: 80.000 h

Details

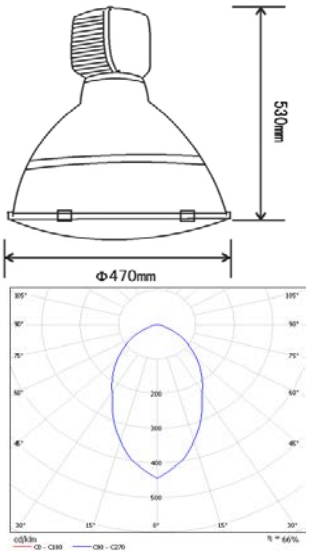

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060Q	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	530 x ø470 mm	≥0,98	**394,40 €**
SLK-XG085Q	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	530 x ø470 mm	≥0,98	**404,60 €**
SLK-XG125Q	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	530 x ø470 mm	≥0,98	**435,20 €**
SLK-XG165Q	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	530 x ø470 mm	≥0,98	**459,00 €**

SLK-XGO




CHARACTERISTICS

- Luminary with cast aluminium housing, high-intensity reflective screen high purity aluminium.
- Especially suitable for illumination of factories, warehouses and other workplaces.

Vida útil: 80.000 h

Details

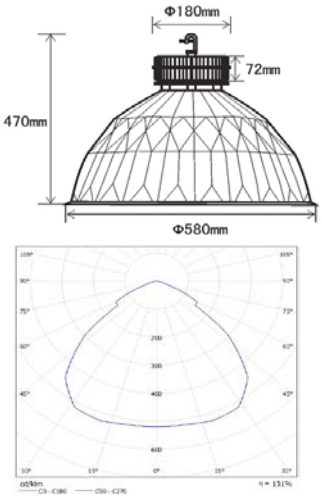

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060O	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø580 mm	≥0,98	**268,60 €**
SLK-XG085O	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø580 mm	≥0,98	**282,20 €**
SLK-XG125O	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø580 mm	≥0,98	**295,80 €**
SLK-XG165O	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø580 mm	≥0,98	**309,40 €**

SLK-XGF




CHARACTERISTICS

- Luminary with cast aluminium housing, high-intensity reflective screen high purity aluminium.
- Especially suitable for illumination of factories, warehouses and other workplaces.

Vida útil: 80.000 h

Details

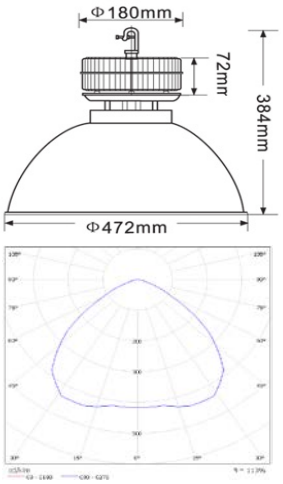

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060F	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	384 x ø472 mm	≥0,98	**261,80 €**
SLK-XG085F	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	384 x ø472 mm	≥0,98	**275,40 €**
SLK-XG125F	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	384 x ø472 mm	≥0,98	**289,00 €**
SLK-XG165F	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	384 x ø472 mm	≥0,98	**302,60 €**

SLK-XGT




CHARACTERISTICS

- Aluminium Housed high strength.
- Reflector of high purity aluminium.
- Ensures a high luminous flux, reducing reflection attenuation.
- Suitable for lighting factories, warehouses and other workplaces.

Vida útil: 80.000 h

Details

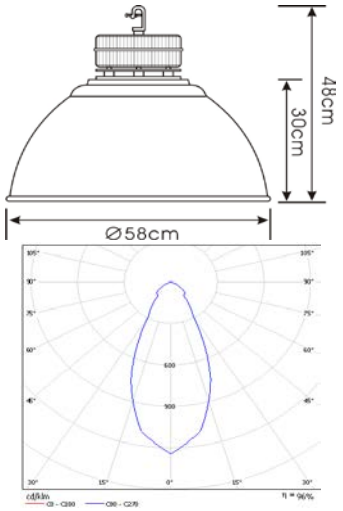

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060T	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	480 x ø580 mm	≥0,98	**282,20 €**
SLK-XG085T	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	480 x ø580 mm	≥0,98	**292,40 €**
SLK-XG125T	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	480 x ø580 mm	≥0,98	**309,40 €**
SLK-XG165T	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	480 x ø580 mm	≥0,98	**329,80 €**


SLK-XGK



CHARACTERISTICS

- Aluminium Housed high strength.
- Reflector of high purity aluminium.
- Ensures a high luminous flux, reducing reflection attenuation.
- Suitable for lighting factories, warehouses and other places of work.

Details

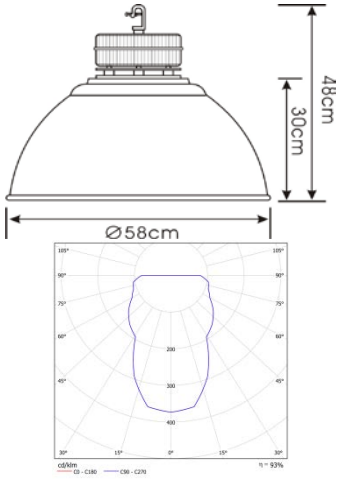

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060K	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	300 x ø430 mm	≥0,98	**289,00 €**
SLK-XG085K	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	300 x ø430 mm	≥0,98	**306,00 €**
SLK-XG125K	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	300 x ø430 mm	≥0,98	**323,00 €**
SLK-XG165K	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	300 x ø430 mm	≥0,98	**336.60 €**


SLK-XGM



CHARACTERISTICS

- Aluminium Housed high strength.
- Reflector of high purity aluminium.
- Ensures a high luminous flux, reducing reflection attenuation.
- The light output is steerable.
- Suitable for lighting factories, warehouses and other workplaces.

Details

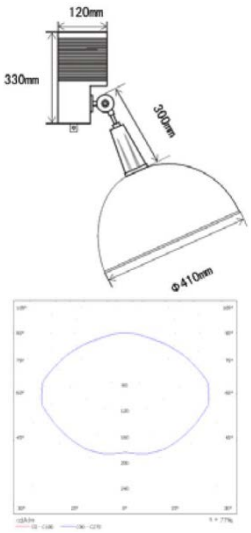

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XG060M	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	300 x ø410 mm	≥0,98	**302,60 €**
SLK-XG085M	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	300 x ø410 mm	≥0,98	**316,20 €**
SLK-XG125M	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	300 x ø410 mm	≥0,98	**326,40 €**
SLK-XG165M	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	300 x ø410 mm	≥0,98	**360,40 €**

SLK-FGF





CHARACTERISTICS

- Made of cast aluminium plate.
- The inside of lampshade is processed with a polishing treatment to ensure durability.
- Suitable for lighting in outdoor advertising, docks, squares and other similar places, especially in three-dimensional lighting for high-rise buildings and urban settings.

Vida útil: 80.000 h

Details

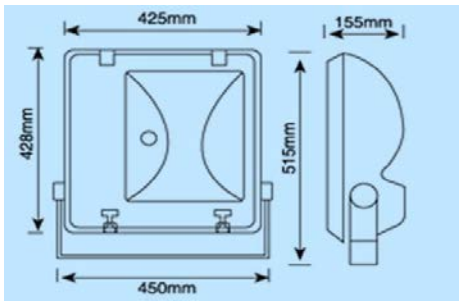

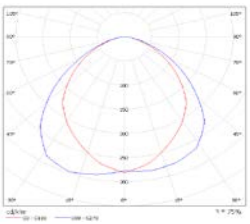

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FG060F	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	425 x 428 x 155 mm	≥0,98	**278,80 €**
SLK-FG085F	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	425 x 428 x 155 mm	≥0,98	**292,40 €**
SLK-FG125F	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	425 x 428 x 155 mm	≥0,98	**306,00 €**
SLK-FG165F	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	425 x 428 x 155 mm	≥0,98	**333,20 €**

SLK-FGH





CHARACTERISTICS

- Made of cast high intensity static thermal plastic coated.
- Incorporating stainless steel fasteners to the detachment, which makes it easier to maintain and replace the lamp.
- It also has a full set of stainless steel fasteners.
- It is especially applicable to the outdoor advertising lighting, docks, squares, etc.
- Especially useful in dimensional lighting or projection in high-rise buildings.

Vida útil: 80.000 h

Details

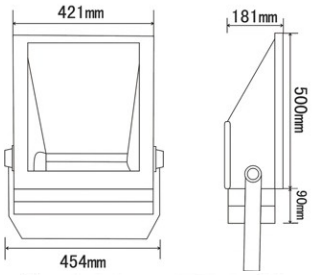

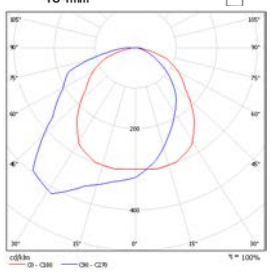

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FG060H	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	630 x 454 x 181 mm	≥0,98	**397,80 €**
SLK-FG085H	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	630 x 454 x 181 mm	≥0,98	**404,60 €**
SLK-FG125H	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	630 x 454 x 181 mm	≥0,98	**445,40 €**
SLK-FG165H	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	630 x 454 x 181 mm	≥0,98	**465,80 €**

SLK-TGA





CHARACTERISTICS

- Luminary moulded high purity aluminium.
- Tempered glass screen.
- Electrical box with aluminium alloy Silastic sealing ring.
- The integrated design allows easier maintenance.
- Excellent heat diffusion behaviour and corrosion resistance.
- The angle of the lamp can be adjusted to the extent required.
- Applicable in the lighting works, public squares, airports, stations and shopping centers.

Vida útil: 80.000 h

Details

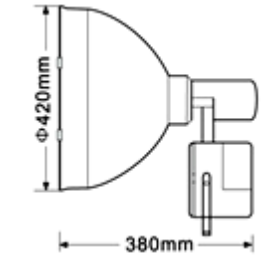

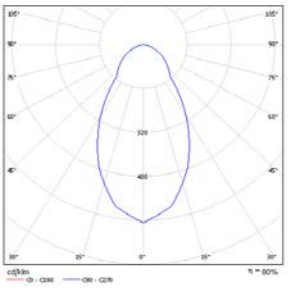

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-TG060A	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	380 x ø420 mm	≥0,98	**272,00 €**
SLK-TG085A	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	380 x ø420 mm	≥0,98	**278,80 €**
SLK-TG125A	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	380 x ø420 mm	≥0,98	**357,00 €**
SLK-TG165A	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	380 x ø420 mm	≥0,98	**425,00 €**

SLK-TGD





CHARACTERISTICS

- Cast aluminium housing with high intensity plastic outer thermal protection static.
- High resistance to impact and corrosion providing durability.
- Particularly suitable for the lighting of buildings, stadiums, docks, and recreational sites in general public spaces that require bright light.

Vida útil: 80.000 h

Details

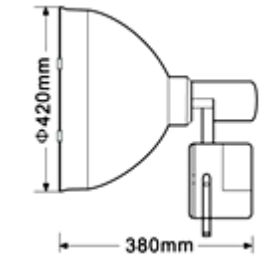

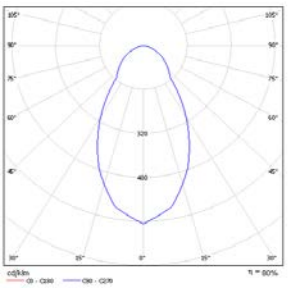

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-TG060D	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	380 x ø420 mm	≥0,98	**333,20 €**
SLK-TG085D	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	380 x ø420 mm	≥0,98	**340,00 €**
SLK-TG125D	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	380 x ø420 mm	≥0,98	**391,00 €**
SLK-TG165D	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	380 x ø420 mm	≥0,98	**425,00 €**

SLK-DTG01




CHARACTERISTICS

- Luminary with cast aluminium housing with high intensity.
- Reflector of high purity aluminium.
- Indicated in lighting of malls and supermarkets.

Vida útil: 80.000 h

Details

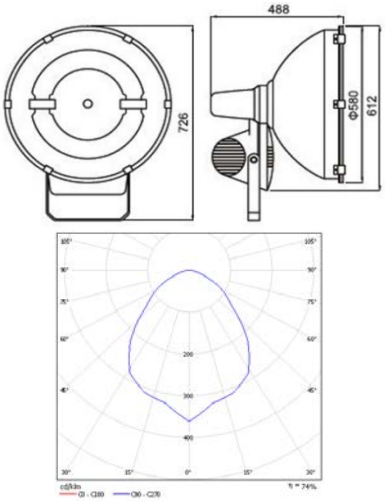

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DT080G01	IP65	80W	6400lm	2700 – 6400K	240V AC	180 – 250V AC	488 x ø580 mm	≥0,98	**425,00 €**
SLK-DT100G01	IP65	100W	8000lm	2700 – 6400K	240V AC	180 – 250V AC	488 x ø580 mm	≥0,98	**459,00 €**
SLK-DT120G01	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	488 x ø580 mm	≥0,98	**476,00 €**
SLK-DT150G01	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	488 x ø580 mm	≥0,98	**493,00 €**
SLK-DT200G01	IP65	200W	16000lm	2700 – 6400K	240V AC	180 – 250V AC	488 x ø580 mm	≥0,98	**510,00 €**
SLK-DT300G01	IP65	300W	24000lm	2700 – 6400K	240V AC	180 – 250V AC	488 x ø580 mm	≥0,98	**578,00 €**

SLK-DFG04




CHARACTERISTICS

- Projector lamp with cast aluminium housing with high intensity.
- Reflector of high purity aluminium.
- Indicated in lighting of malls and supermarkets.

Vida útil: 80.000 h

Details

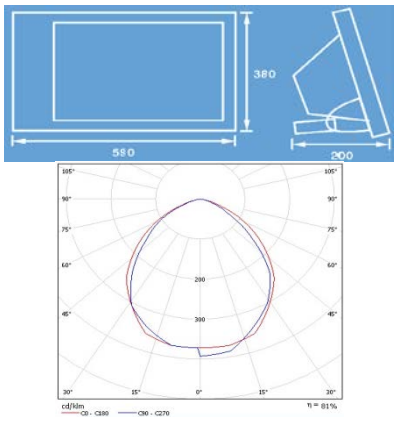

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DFG08004	IP65	80W	6400lm	2700 – 6400K	240V AC	180 – 250V AC	590 x 380 x 200 mm	≥0,98	**493,00 €**
SLK-DFG10004	IP65	100W	8000lm	2700 – 6400K	240V AC	180 – 250V AC	590 x 380 x 200 mm	≥0,98	**510,00 €**
SLK-DFG12004	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	590 x 380 x 200 mm	≥0,98	**527,00 €**
SLK-DFG15004	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	590 x 380 x 200 mm	≥0,98	**544,00 €**
SLK-DFG20004	IP65	200W	16000lm	2700 – 6400K	240V AC	180 – 250V AC	590 x 380 x 200 mm	≥0,98	**595,00 €**
SLK-DFG30004	IP65	300W	24000lm	2700 – 6400K	240V AC	180 – 250V AC	590 x 380 x 200 mm	≥0,98	**646,00 €**

SLK-DFG05




CHARACTERISTICS

- Projector lamp with cast aluminium housing with high intensity.
- Reflector of high purity aluminium.
- Indicated in the lighting of shopping malls and supermarkets.

Vida útil: 80.000 h

Details

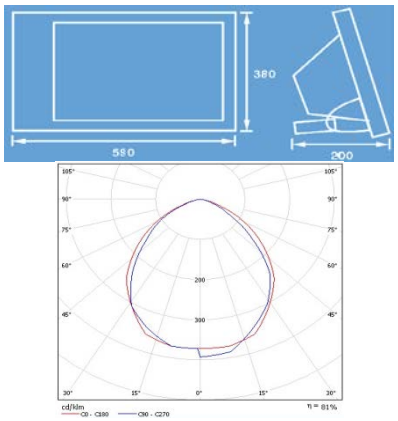

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DFG12005	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	700 x 380 x 200 mm	≥0,98	**544,00 €**
SLK-DFG15005	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	700 x 380 x 200 mm	≥0,98	**561,00 €**
SLK-DFG20005	IP65	200W	16000lm	2700 – 6400K	240V AC	180 – 250V AC	700 x 380 x 200 mm	≥0,98	**595,00 €**
SLK-DFG30005	IP65	300W	24000lm	2700 – 6400K	240V AC	180 – 250V AC	700 x 380 x 200 mm	≥0,98	**646,00 €**

SLK-DLD




CHARACTERISTICS

- Made of galvanized steel.
- The surface of the housing is coated with fluorine carbon coating of high quality.
- Style design, easy installation, high decorative properties.
- Useful for lighting in public parks, small towns, pedestrian streets, residences, etc..

Vida útil: 80.000 h

Details

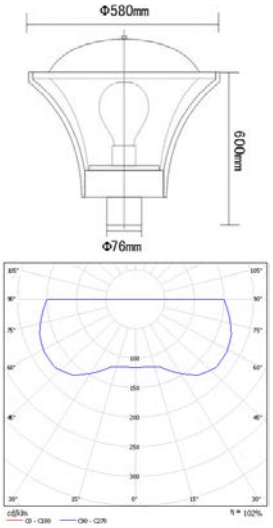

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DL060D	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	600 x ø580 mm	≥0,98	**367,20 €**
SLK-DL085D	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	600 x ø580 mm	≥0,98	**391,00 €**
SLK-DL125D	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	600 x ø580 mm	≥0,98	**404,60 €**
SLK-DL165D	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	600 x ø580 mm	≥0,98	**425,00 €**

SLK-DLG





CHARACTERISTICS

- Cast aluminium luminary high intensity external static coated thermal plastic.
- Specially designed for residential lighting, public parks, playgrounds, plazas, pedestrian, etc..

Vida útil: 80.000 h

Details





Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DL060G	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	620 x ø430 mm	≥0,98	**367,20 €**
SLK-DL085G	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	620 x ø430 mm	≥0,98	**391,00 €**
SLK-DL125G	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	620 x ø430 mm	≥0,98	**404,60 €**
SLK-DL165G	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	620 x ø430 mm	≥0,98	**425,00 €**

SLK-FBA





CHARACTERISTICS

*Anti explosion luminary specially designed for establishments such as gas stations.

Vida útil: 80.000 h

Details

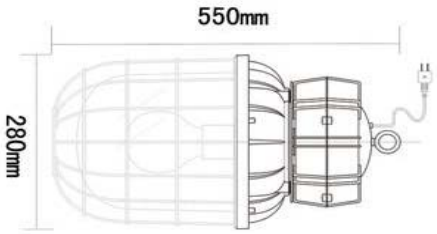



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FB060A	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	550 x ø280 mm	≥0,98	**323,00 €**
SLK-FB085A	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	550 x ø280 mm	≥0,98	**329,80 €**
SLK-FB125A	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	550 x ø280 mm	≥0,98	**336,60 €**

SLK-FBE





CHARACTERISTICS

Anti explosion luminary specially designed for establishments such as gas stations.

Vida útil: 80.000 h

Details





Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FB060E	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø240 mm	≥0,98	**445,40 €**
SLK-FB085E	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø240 mm	≥0,98	**459,00 €**
SLK-FB125E	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø240 mm	≥0,98	**472,60 €**
SLK-FB165E	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	470 x ø240 mm	≥0,98	**486,20 €**

SLK-XDC





CHARACTERISTICS

*Anti explosion luminary specially designed for establishments like gas stations...

Vida útil: 80.000 h

Details

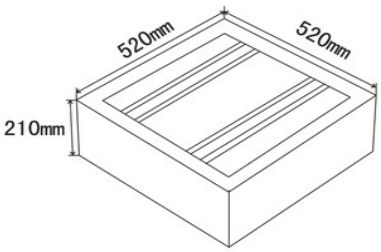



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XD060C	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	520 x 520 x 210 mm	≥0,98	**374,00 €**
SLK-XD085C	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	520 x 520 x 210 mm	≥0,98	**438,60 €**
SLK-XD125C	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	520 x 520 x 210 mm	≥0,98	**462,40 €**
SLK-XD165C	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	520 x 520 x 210 mm	≥0,98	**506,60 €**

SLK-XDB1





CHARACTERISTICS

- Luminary with cast aluminium housing.
- PVC screen that provides a nice and soft light.
- It is built on the roof.
- Especially suitable lighting in shopping centers, supermarkets and similar places.

Vida útil: 80.000 h

Details

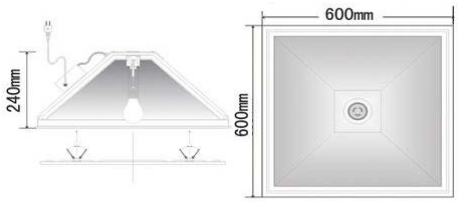



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XD060B1	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	600 x 600 x 240 mm	≥0,98	**258,40 €**
SLK-XD085B1	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	600 x 600 x 240 mm	≥0,98	**268,60 €**
SLK-XD125B1	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	600 x 600 x 240 mm	≥0,98	**289,00 €**
SLK-XD165B1	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	600 x 600 x 240 mm	≥0,98	**302,60 €**

SLK-XDD1





CHARACTERISTICS

- Luminary with cast aluminium housing.
- PVC screen that provides a nice and soft light.
- It can be installed projecting from the ceiling.
- Especially suitable lighting in shopping centers, supermarkets and similar places.

Vida útil: 80.000 h

Details

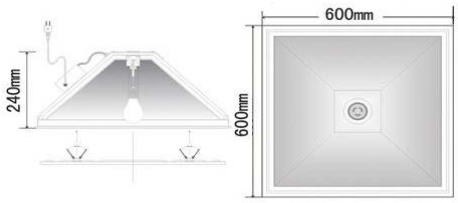



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-XD060D1	IP65	60W	4200lm	2700 – 6400K	240V AC	180 – 250V AC	585 x 585 x 230 mm	≥0,98	**258,40 €**
SLK-XD085D1	IP65	85W	5440lm	2700 – 6400K	240V AC	180 – 250V AC	585 x 585 x 230 mm	≥0,98	**268,60 €**
SLK-XD125D1	IP65	125W	7875lm	2700 – 6400K	240V AC	180 – 250V AC	585 x 585 x 230 mm	≥0,98	**289,00 €**
SLK-XD165D1	IP65	165W	9900lm	2700 – 6400K	240V AC	180 – 250V AC	585 x 585 x 230 mm	≥0,98	**302,60 €**

SLK-DXD01





CHARACTERISTICS

- Luminary with cast aluminium housing.
- PVC screen that provides a nice and soft light.
- It is built on the roof.
- Especially suitable lighting in shopping centers, supermarkets and similar places.

Vida útil: 80.000 h

Details

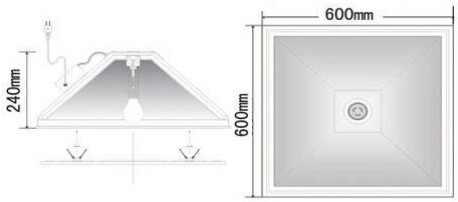



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DX040D01	IP65	40W	3200lm	2700 – 6400K	240V AC	180 – 250V AC	600 x 600 x 240 mm	≥0,98	**238,00 €**
SLK-DX080D01	IP65	80W	6400lm	2700 – 6400K	240V AC	180 – 250V AC	600 x 600 x 240 mm	≥0,98	**272,00 €**
SLK-DX100D01	IP65	100W	8000lm	2700 – 6400K	240V AC	180 – 250V AC	600 x 600 x 240 mm	≥0,98	**306,00 €**
SLK-DX120D01	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	600 x 600 x 240 mm	≥0,98	**340,00 €**
SLK-DX150D01	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	600 x 600 x 240 mm	≥0,98	**374,00 €**

SLK-TDA





CHARACTERISTICS

- The main body of the lamp is an aluminium structure.
- The reflector provides excellent good reflection and light distribution.
- Provides high light efficiency, long life, good color rendering performance, stable light, no flickering, soft light, energy saving and eye protection.
- Interior lighting of shopping malls, supermarkets, hotels, offices, meeting rooms, warehouses, exhibition centers, villas, etc.

Vida útil: 80.000 h

Details



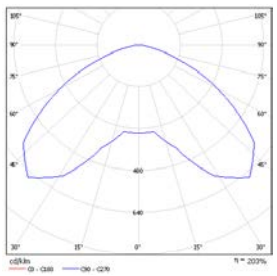

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-TD020A	IP65	20W	1400lm	2700 – 6400K	240V AC	180 – 250V AC	235 x ø240 mm	≥0,98	**80,58 €**
SLK-TD030A	IP65	30W	2100lm	2700 – 6400K	240V AC	180 – 250V AC	235 x ø240 mm	≥0,98	**90,78 €**
SLK-XTD040A	IP65	40W	2800lm	2700 – 6400K	240V AC	180 – 250V AC	235 x ø240 mm	≥0,98	**97,58 €**

SLK-TDB





CHARACTERISTICS

- Main body of cold formed aluminium.
- Reflector of high purity aluminium, with a simpler structure, aesthetic and durable.
- Use electrode less lamps, highly efficient light production.
- Long life, good performance in color representation.
- Light stable, with no flickering, soft, energy-saving and eye protection.
- Interior lighting of shopping malls, supermarkets, hotels, offices, meeting rooms, warehouses, exhibition centers, villas, etc.

Vida útil: 80.000 h

Details

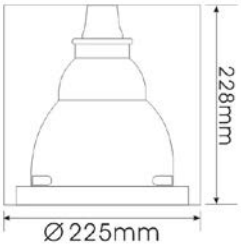

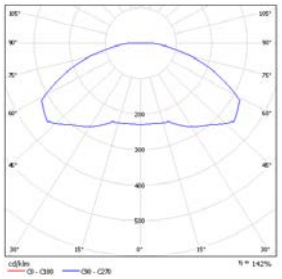

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-TD020B	IP65	20W	1400lm	2700 – 6400K	240V AC	180 – 250V AC	228 x ø225 mm	≥0,98	**84,66 €**
SLK-TD030B	IP65	30W	2100lm	2700 – 6400K	240V AC	180 – 250V AC	228 x ø225 mm	≥0,98	**94,86 €**
SLK-XTD040B	IP65	40W	2800lm	2700 – 6400K	240V AC	180 – 250V AC	228 x ø225 mm	≥0,98	**101,66 €**

SLK-SEF E27




CHARACTERISTICS

*E27 compact lamp.

Vida útil: 80.000 h

Details

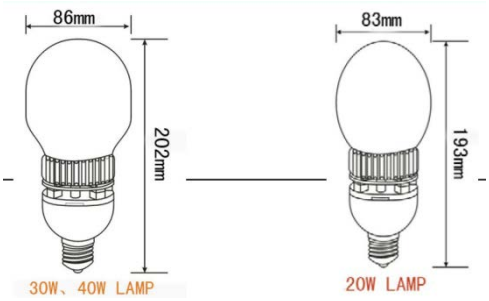

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-SEF20	IP65	20W	1258lm	2700 – 6400K	240V AC	180 – 250V AC	193 x ø86 mm	≥0,90	**54,40 €**
SLK-SEF30	IP65	30W	2261lm	2700 – 6400K	240V AC	180 – 250V AC	202 x ø86 mm	≥0,90	**61,20 €**
SLK-SEF40	IP65	40W	2472lm	2700 – 6400K	240V AC	180 – 250V AC	202 x ø86 mm	≥0,90	**64,60 €**

SLK-SEF E40




CHARACTERISTICS

*E40 thread compact lamp.

Vida útil: 80.000 h

Details

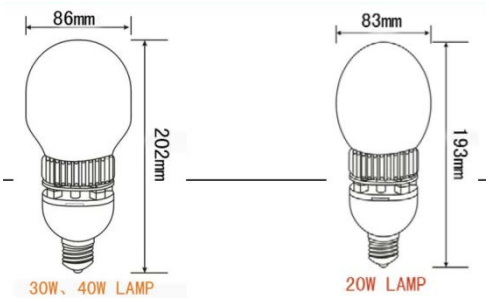

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-SEF20E40	IP65	20W	1258lm	2700 – 6400K	240V AC	180 – 250V AC	193 x ø86 mm	≥0,90	**57,80 €**
SLK-SEF30E40	IP65	30W	2261lm	2700 – 6400K	240V AC	180 – 250V AC	202 x ø86 mm	≥0,90	**64,60 €**
SLK-SEF40E40	IP65	40W	2472lm	2700 – 6400K	240V AC	180 – 250V AC	202 x ø86 mm	≥0,90	**68,00 €**

SLK-DSEF E27




CHARACTERISTICS

*E27 compact lamp at low frequency.

Vida útil: 80.000 h

Details

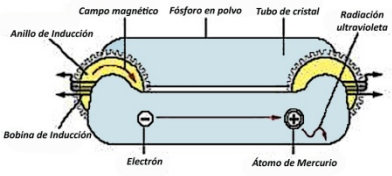

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DSEF23	IP65	23W	1725lm	2700 – 6400K	240V AC	180 – 250V AC	202 x ø86 mm	≥0,98	**62,90 €**
SLK-DSEF27	IP65	27W	2025lm	2700 – 6400K	240V AC	180 – 250V AC	202 x ø86 mm	≥0,98	**68,00 €**

SLK-DSEF 40W E27




CHARACTERISTICS

Lamp E27 compact low frequency.

Vida útil: 80.000 h

Details

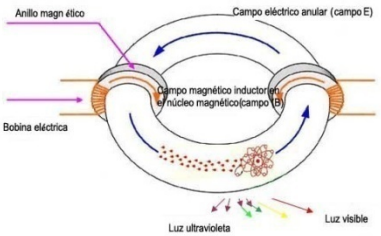

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DSEF40	IP65	40W	3000lm	2700 – 6400K	240V AC	180 – 250V AC	202 x ø105 mm	≥0,98	**115,60 €**

SLK-FTO E40



CHARACTERISTICS

*Lamp and ballast bulb consists of independent E40 thread.

Vida útil: 80.000 h

Details



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FT060OE40	IP65	60W	4110lm	2700 – 6400K	240V AC	180 – 250V AC	222 x ø88 mm	≥0,90	**193,80 €**
SLK-FT085OE40	IP65	85W	5509lm	2700 – 6400K	240V AC	180 – 250V AC	222 x ø88 mm	≥0,90	**204,00 €**
SLK-FT125OE40	IP65	125W	8457lm	2700 – 6400K	240V AC	180 – 250V AC	222 x ø88 mm	≥0,90	**217,60 €**

SLK-FT E40



CHARACTERISTICS

*Lamp and ballast bulb made separate thread E40.

Vida útil: 80.000 h

Details



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FT060E40	IP65	60W	4110lm	2700 – 6400K	240V AC	180 – 250V AC	222 x ø110 mm	≥0,90	**193,80 €**
SLK-FT085E40	IP65	85W	5509lm	2700 – 6400K	240V AC	180 – 250V AC	222 x ø110 mm	≥0,90	**204,00 €**
SLK-FT125E40	IP65	125W	8457lm	2700 – 6400K	240V AC	180 – 250V AC	222 x ø110 mm	≥0,90	**217,60 €**

SLK-FTO ANTENA



CHARACTERISTICS

*Bulb lamp composed of independent ballast type antenna.

Vida útil: 80.000 h

Details



Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FT060L	IP65	60W	4110lm	2700 – 6400K	240V AC	180 – 250V AC	ø120 x 235 x ø88 mm	≥0,90	**180,20 €**
SLK-FT085L	IP65	85W	5509lm	2700 – 6400K	240V AC	180 – 250V AC	ø120 x 235 x ø88 mm	≥0,90	**187,00 €**
SLK-FT125L	IP65	125W	8457lm	2700 – 6400K	240V AC	180 – 250V AC	ø120 x 235 x ø88 mm	≥0,90	**200,60 €**
SLK-FT165L	IP65	165W	10351lm	2700 – 6400K	240V AC	180 – 250V AC	ø120 x 235 x ø88 mm	≥0,90	**221,00 €**

SLK-FT ANTENA




CHARACTERISTICS

*Bulb lamp composed of independent ballast antenna type.

Vida útil: 80.000 h

Details

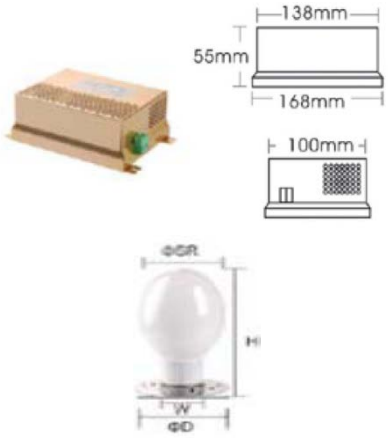

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-FT060	IP65	60W	4110lm	2700 – 6400K	240V AC	180 – 250V AC	ø120 x 235 x ø110 mm	≥0,90	**180,20 €**
SLK-FT085	IP65	85W	5509lm	2700 – 6400K	240V AC	180 – 250V AC	ø120 x 235 x ø110 mm	≥0,90	**187,00 €**
SLK-FT125	IP65	125W	8457lm	2700 – 6400K	240V AC	180 – 250V AC	ø120 x 235 x ø110 mm	≥0,90	**200,60 €**
SLK-FT165	IP65	165W	10351lm	2700 – 6400K	240V AC	180 – 250V AC	ø120 x 235 x ø110 mm	≥0,90	**221,00 €**


SLK-BALASTRO

CHARACTERISTICS

*Electronic ballast induction.

Details





Vida útil: 80.000 h

Reference	Volts	Nominal voltage	Input voltage	Measure	Price
930-DAA26-FT060	60W	240V AC	180 – 250V AC	168 x 100 x 55 mm	**98,60 €**
930-DAA26-FT085	85W	240V AC	180 – 250V AC	168 x 100 x 55 mm	**108,80 €**
930-DAA26-FT125	125W	240V AC	180 – 250V AC	168 x 100 x 55 mm	**119,00 €**
930-DAA26-FT165	165W	240V AC	180 – 250V AC	168 x 100 x 55 mm	**132,60 €**


SLK-DFTA

CHARACTERISTICS

*Circular lamp ballast low frequency independent.

Details



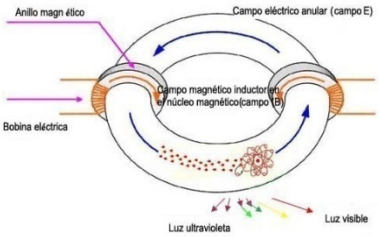

Vida útil: 80.000 h

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DFT040A	IP65	40W	3200lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**146,20 €**
SLK-DFT080A	IP65	80W	6400lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**187,00 €**
SLK-DFT100A	IP65	100W	8000lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**197,20 €**
SLK-DFT120A	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**221,00 €**
SLK-DFT150A	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**238,00 €**
SLK-DFT200A	IP65	200W	16000lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**272,00 €**
SLK-DFT300A	IP65	300W	24000lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**340,00 €**


SLK-DFTB



CHARACTERISTICS

*Circular lamp ballast low frequency independent.

Details

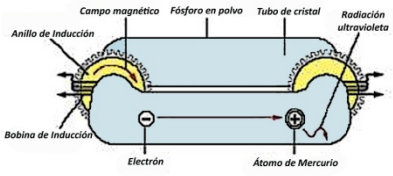

Reference	IP	Volts	Lumen	Color	Nominal voltage	Input voltage	Measure	Power Factor	Price
SLK-DFT040A	IP65	40W	3200lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**146,20 €**
SLK-DFT080A	IP65	80W	6400lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**187,00 €**
SLK-DFT100A	IP65	100W	8000lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**197,20 €**
SLK-DFT120A	IP65	120W	9600lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**221,00 €**
SLK-DFT150A	IP65	150W	12000lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**238,00 €**
SLK-DFT200A	IP65	200W	16000lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**272,00 €**
SLK-DFT300A	IP65	300W	24000lm	2700 – 6400K	240V AC	180 – 250V AC	182 x 114 x 74 mm	≥0,98	**340,00 €**



by Solar Trace®
AmbarLEDS®
LUMINOUS EFFICIENCY TAKEN TO EXTREME