Import Sun PV™

Polycrystalline Silicon Solar Modules

High-efficiency photovoltaic module using silicon nitride coated polycrystalline silicon cells.

- Solar Cell: High efficiency crystalline solar cell. Even if under the weak light, the solar module can produce maximum power output.

- Tempered glass: Anti-reflecting coating and high transmission rate glass increase the power output and mechanical strength of solar module.

- EVA and TPT: Using high quality EVA and TPT to prevent destroying and water.

- All frame: Without screw, corner connection. 4holes on the frame can be installed easily.

- Junction box: Multi function junction box with water proof.


- Less power decrease.

- Good performance of preventing from atrocious weather such as wind and hails.

- Resisting moisture and etching effectively, not effect by geology.

- The certificate issued by international authority: ISO Quality Management system, CE,VDE(IEC61215 and IEC61730)



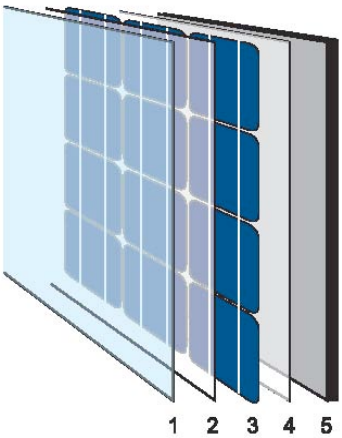

1 Tempered glass
2 EVA
3 Cells
4 EVA
5 TPT

Electric Characteristics

Model	CN-15P
Maximum Power(Pmax)	15
Open circuit voltage (Voc)	21.8
Short circuit current (Isc)	0.92
Voltage at Pmax (Vpm)	18.2
Current at Pmax (Ipm)	0.82
Solar Cell Efficiency (%)	13.2
Solar Module Efficiency(%)	10.50
Maximum system voltage	1000VDC be approved by VDE (IEC61215 and IEC61730)

STC: Irradiance 1000W/m^2 , Temperature 25℃, AM=1.5

Mechanical Characteristics

Solar cells	36cells in a 4×9 connected in series.
Power tolerance	±3%
Dimensions	396*364*17mm
Weight	2.5 kg
Frame	Clear anodized aluminum alloy frame; Color: silver

Module Diagram

